



FLP | FP | FS

Productivity Line

Productive. Flexible.

 **SORALUCE**

As part of our premium solutions, the **Productivity Line** floor type milling machines of Soraluce allows productivity to be taken to the next level, providing the **maximum stock removal capacity and the highest versatility** in the market.



Productive Flexible Heavy-duty

TOP BENEFITS	PRODUCTIVITY	PRECISION	RELIABILITY	FLEXIBILITY
Design	■	■	■	■
Full cast iron structure	■	■	■	
Multiple configurations	■			■
Linear guiding & Damping Pads	■	■	■	
DAS+	■	■	■	
Driving system	■	■	■	

FLP | FP | FS: Floor type milling machines






Nine reasons to choose Productivity Line

01.

A winning combination

The most rigid and dynamic solution on the market

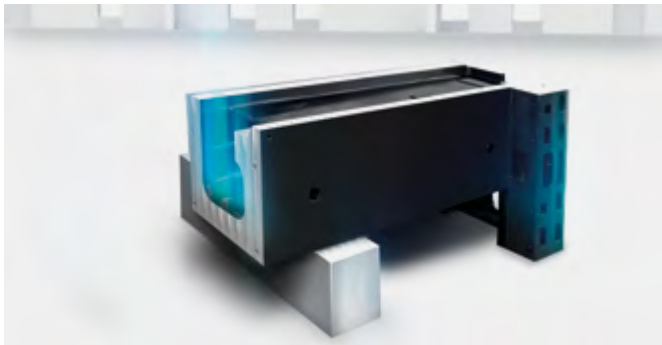


Full cast iron

Long term stability.

Thermostability

- Expansion under control: quantity, speed, direction.
- Vibrations absorption, damping capacity.
- No need of electronic compensations.
- Best performance against temperature variations.
- Main structure: column, saddle, ram.

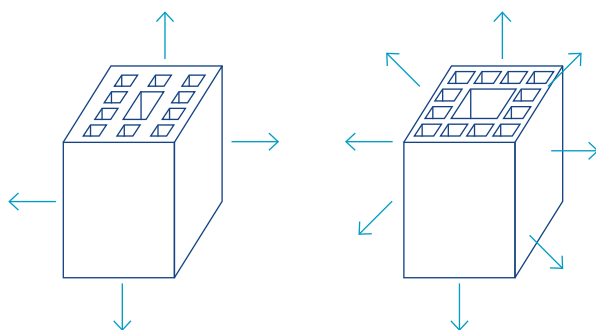

Cast iron

Fabricated steel



Linear guiding

Lifelong durability.

- Soraluze is a pioneer in the use of linear guiding systems in large machines and heavyduty applications.
- Design proven since 1991.
- Lifelong durability > 10 years maintenance free at maximum performance.

TOP BENEFITS	Linear guiding	Prismatic guiding	Hydrostatic guiding
Precision	↑↑↑	→	↑↑
Dynamics	↑↑↑	↓	↑↑
Maintenance free	↑↑↑	↓	↓
Loading capacity	↑↑↑	↑↑	↑↑
Thermal stability	↑↑↑	→	→
Sustainability	↑↑↑	↑	↓↓↓
Foundation cost saving	↑↑↑	↑↑↑	↓↓

Full cast iron

- Accuracy
- Stiffness
- Productivity

Linear guiding



- Best precision
- High dynamics

DAS⁺

- No chatter, best stock removal rate
- Optimized process thanks to real time vibration surveillance

Damping pads

- Stability during machining process
- Vibration absorption

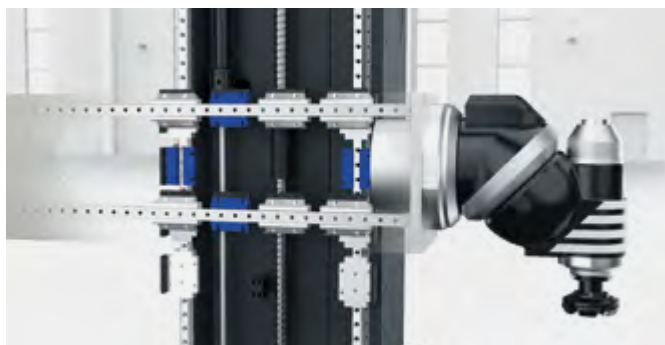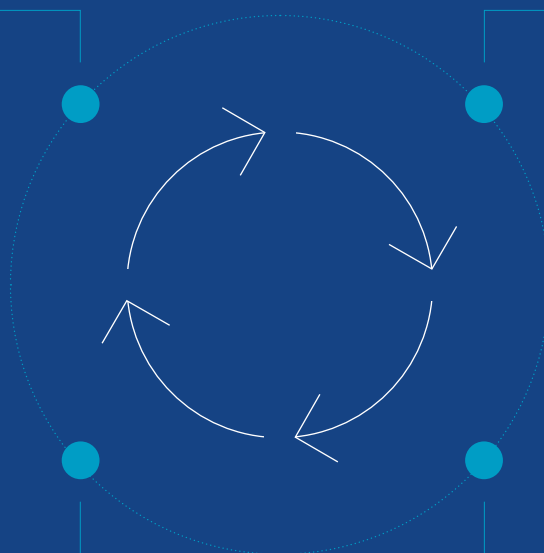

Damping pads

Great stability.

- Own development of special damping pads combined with linear guides.
- Eliminates any vibration during machining processes.

DAS⁺

No chatter.

Active damping system

- 100% cutting capacity through the complete workpiece volume.
- Reduced cycle time up to 45%.
- Increased productivity up to 300%.
- Improved surface quality.
- Extended tool life.
- Machine protected: long term precision as reduces machine's key components wear (ballscrew, guideway, gearbox, head), in both roughing and finishing operations.

How does DAS⁺ work?

DAS⁺ is a smart system which oversees the machining process and selects the best technological alternative to eliminate chatter:

- Active damping in the ram.
- Spindle speed tuning by automatic selection of optimum speed.
- Harmonic oscillation of spindle speed.

02.

Next level technologies

Best stock removal



- Best stock removal with extended ram.
- Great cutting capacity through the complete workpiece volume.


Results FLP Z: 1300 mm | 51"
FP & FS Z: 1600 mm

Stable working conditions, material DIN CK45. DAS+ OFF.

Ø 125 mm | 5" face
milling tool

Ap= 5 mm | 0.2"
Ae= 100 mm | 4"
F= 2020 mm/min | 79 in/min
Q= 1010 cm³/min | 62 in³/min
Power consumption: 100% (37 kW | 49 HP)

Monoblock structure

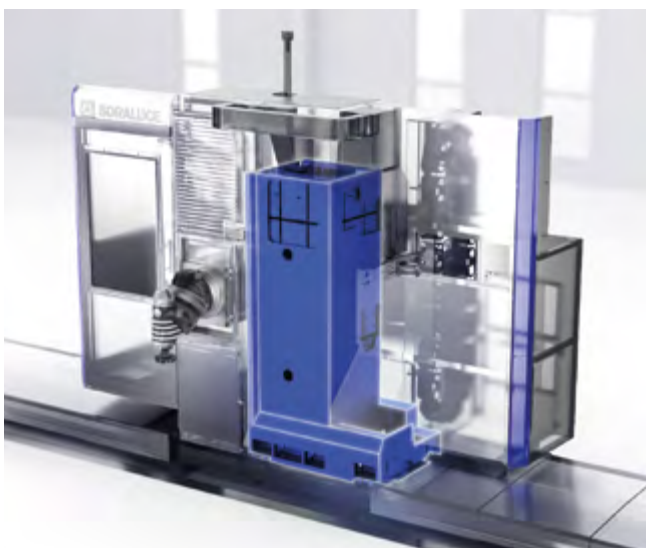

+ Rigidity:

- Column and longitudinal carriage in one piece for maximum stability.
- The best behavior against torsion and bending.

Column size 3 times larger than
box-in-box concept.

Driving system

Reliable

Double rack and pinion system in the longitudinal axis. The best existing solution for long travel axes.

Dynamic


Up to 35,000 mm/min. | 1378 in/min.

Long term accuracy

- No backlash, no wear.
- Highest surface quality.

Maintenance free

Automatic lubrication of the rack and pinion system.

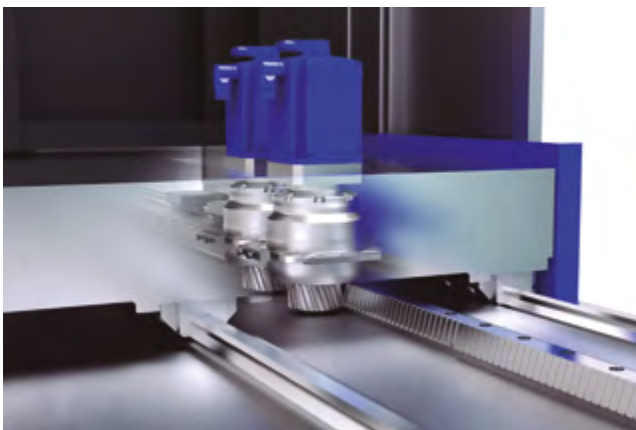


Inline spindle motor

- High efficiency.
- Minimum noise level.
- High performance thanks to optimized power-torque curve.
- Full power at low rpm.
- Short distance between main motor and head transmission.

Compact-design transmission shaft.

Placed at the front of the ram close to the head.

Up to 60 kW
| 80 HP

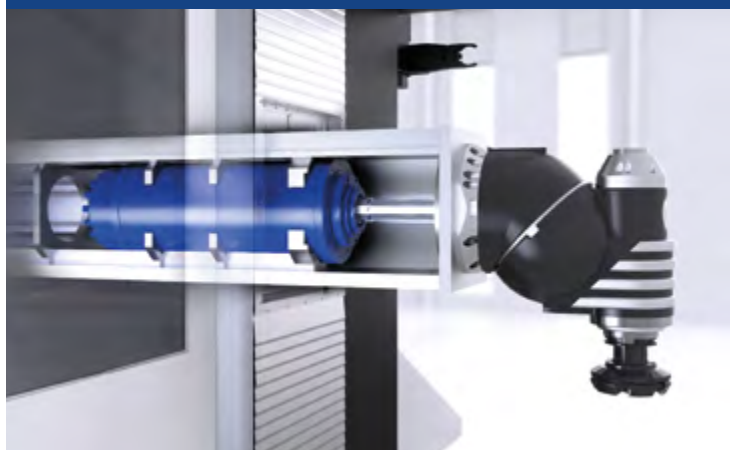

Best reliability

No belts, no reducers, neither long transmission bars.

Great precision

Best thermal stability provided by cooled inline motor.

Enhanced rigidity

Frontal assembly, all sides of the ram are solid.

Ease of maintenance

Quick exchange of the main spindle motor.

03.

Accuracy in the DNA

Increased effective stiffness

Design is conceived to obtain the best precision and rigidity. We keep maximum quality control of manufacturing and assembly until its final verification, using Smart 3D thermal compensation of the machine.

01

Stiffness forces triangle

- Compact saddle for best rigidity.
- The cutting forces are transferred directly from the cross axis roller bearings to the column, minimizing the deformation of the saddle.
- Special Soraluze saddle design with minimum distance between the ram and the column, providing excellent stability, precision and maximum cutting capacity.
- Ram saddle fully guided.

02


Torsion and deformation under control

- Provided by the best guiding system in the market.
- Straightness ensured through a perfect parallelism between guides supporting surfaces.
- Lateral ram torsion constrained by special ribbed design cast iron ram, all sides being solid.
- Full control over ram drop and flexion.

03

Minimum distance

- Short distance from the column to the tool, thanks to the arrangement of the ballscrew and counterweight system.
- Minimum machine overhang.

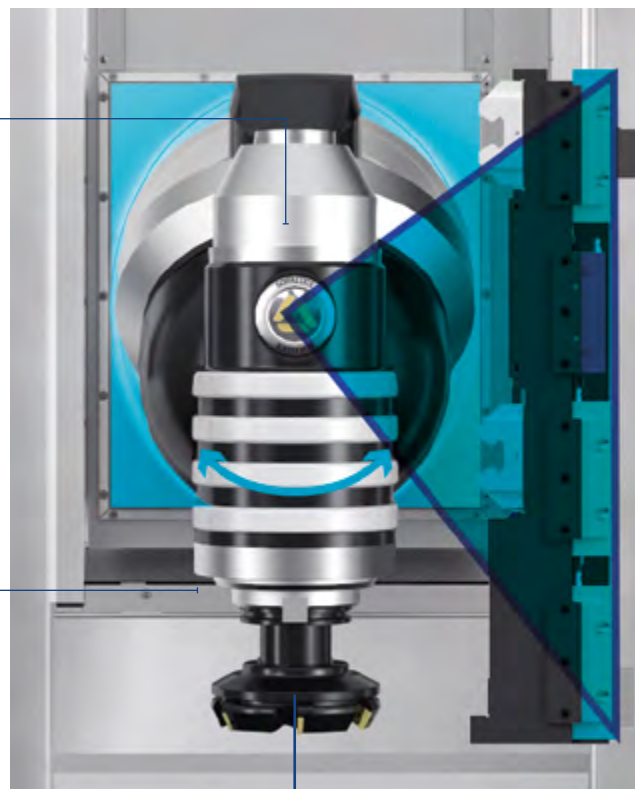


Torsion movement

04

No compensation

- Ram drop under control without electronic compensation.

Superb precision in positioning

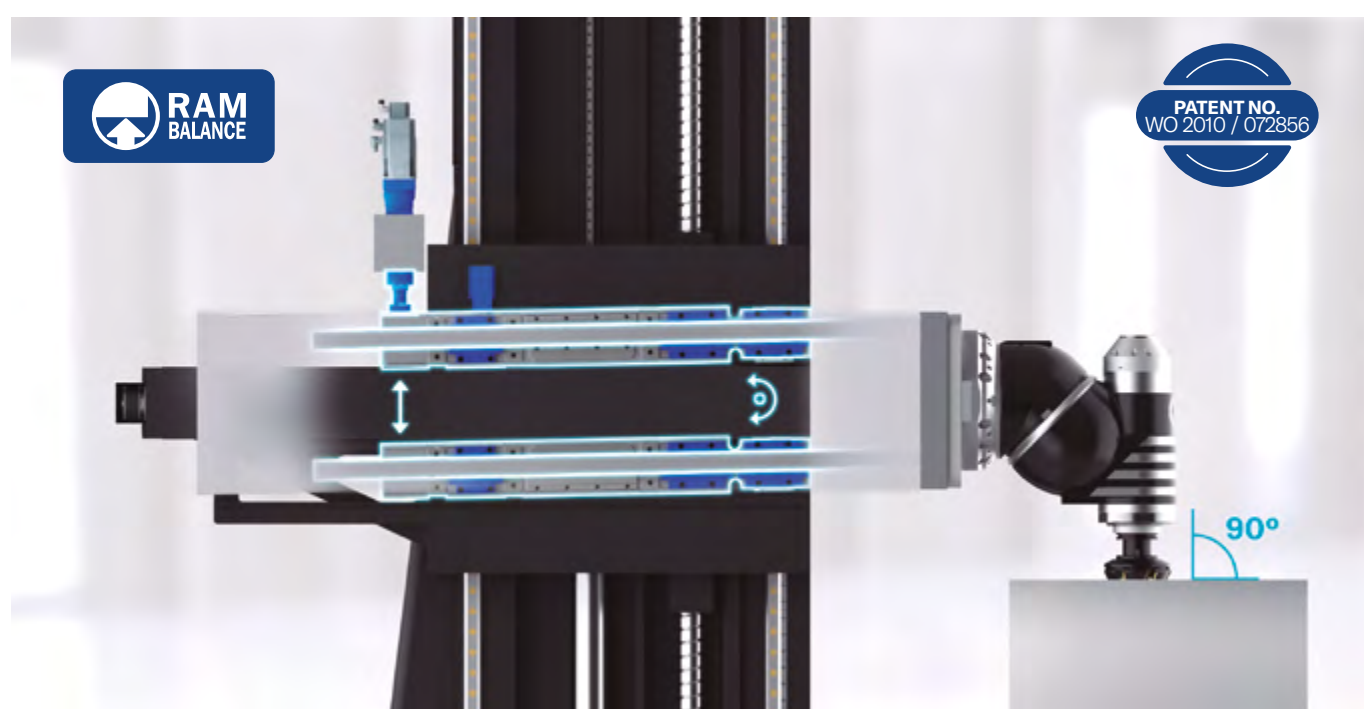

* Available for FP and FS models

The system compensates the angular deflection of the ram caused by the weight of the moving components when they travel along the vertical and cross axes.

Basic system set-up

- NC controlled.
- Direct measuring system.
- Up / down ram movement through electromechanical system in the saddle.

Benefits

- Improves accuracy, straightness and parallelism when vertical and cross axes are moved.
- Real time compensation for different head weights: Maximum guaranteed accuracy, straightness and parallelism for every head in the machine.

Ram drop less than
0.03 mm | 0.0011" with
1900 mm | 74" extended ram

04.

Smart Technology



Automatic re-setting of head kinematics to increase accuracy. It compensates the head articulation positioning deviation for one particular position of the head.

+ ACCURACY



Smart and automatic setting of defined cutting parameters according to actual machine power consumption.

30% time saved in roughing process!

+ PRODUCTIVITY



Eliminates any chatter that may arise during the machining process.

Machine protected: long term precision as reduces machine's key components wear.

+ PRODUCTIVITY
Patent no. EP 3017911



Eliminates chatter originated on either fixtures or workpieces.

+ PRODUCTIVITY
+ QUALITY

Patent no. EP 3226089 B1



Energy save Package

+30% save
on energy consumption

You decide how and when the different components of the machine are switched on / off!

- Spindle
- Axes
- Machine power
- Control
- Lightning
- Air supply
- Hydraulic parts
- Warm-up program
- Calendar planning



NC controlled dynamic correction to improve ram geometrical accuracy, straightness and parallelism when vertical and cross axes are moved.

Ram drop less than 0.03 mm with 1900 mm extended ram

+ ACCURACY
Patent no. WO 2010 / 072856



Fast and simplified component set-up.

+ PRODUCTIVITY
Patent no. EP 2570236 B1



Hydrostatic table balancing system to correct distribution of asymmetric loads.


+ ACCURACY

05.

Soraluce heads

More than
300
head models

Precision &
High performance

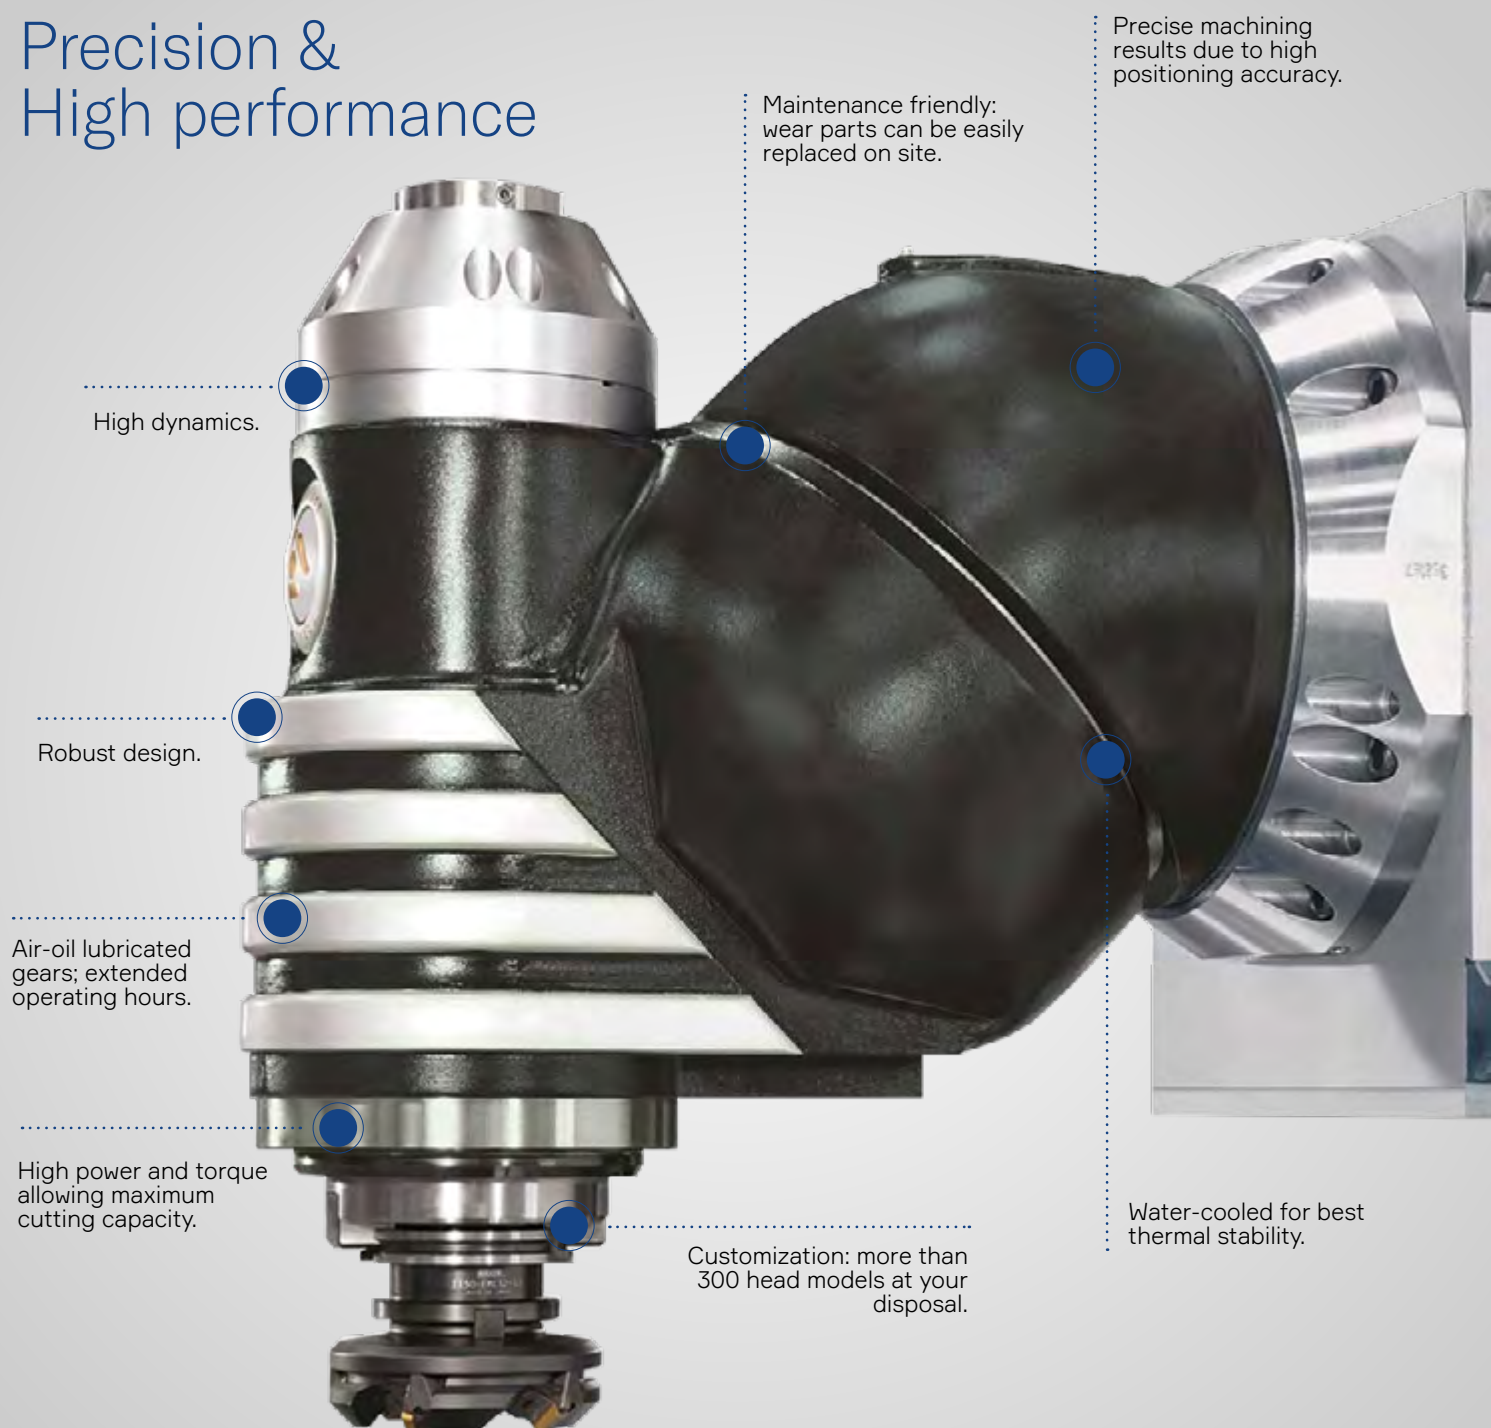

The most advanced head manufacturing center




In-house made



Head service hubs

- Your trusted service partner.
- Know-how directly from the manufacturer.
- Maintenance & repair.
- Spare head service available.

150
Spare heads available

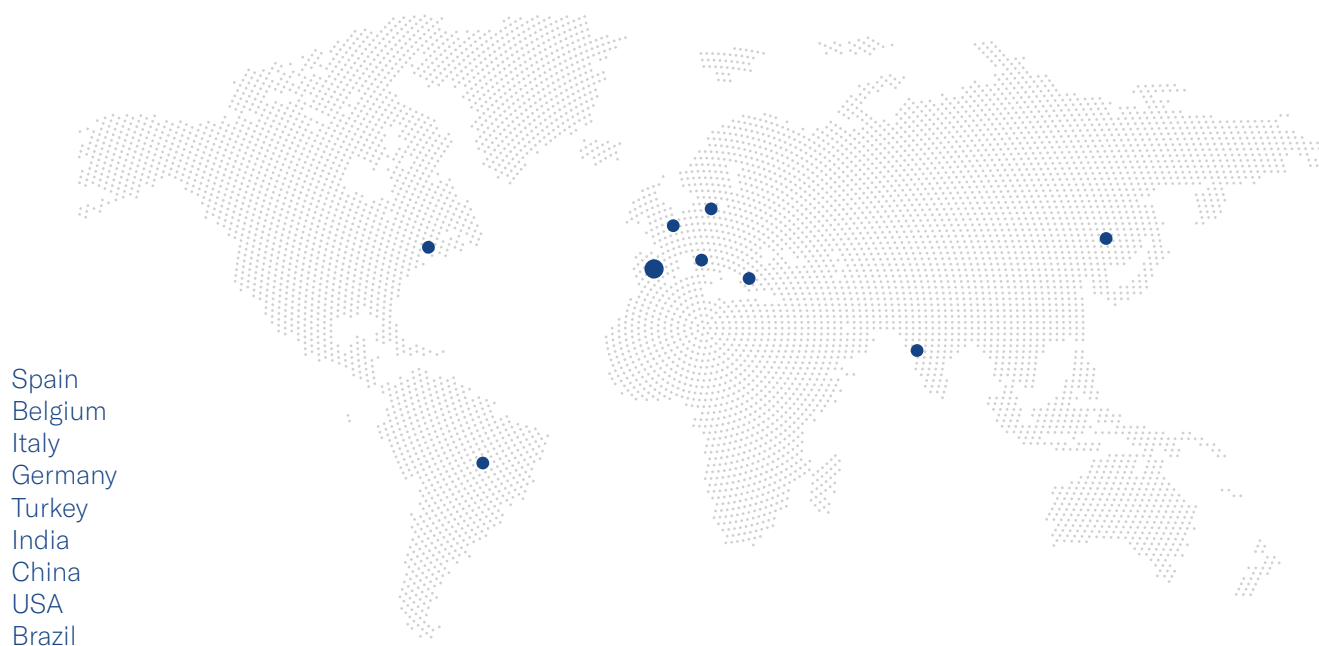



Heavy-duty heads Cooled oil lubrication

- Up to 60 kW | 80 HP (S1-100%).
- Robust performance.
- Highest reliability.
- Long-life design (wear-free gears and bearings).
- Maintenance free.
- Thermal stability.
- Quick change for maintenance purposes.

High performance heads Air-oil lubrication

- Up to 37 kW | 49 HP (S1-100%).
- High speed up to 7000 min⁻¹.
- Optimum accessibility thanks to reduced size.
- Robust performance.
- Highest reliability.
- Fast positioning.
- Thermal stability.
- Quick change for maintenance purposes.

Thousands of possibilities

Universal head

37 / 60 kW | 49 / 80 HP (S1)
2.5° x 2.5° / 1° x 2.5° / 0.001° x 0.001°
6000 / 7000 min⁻¹

Multitasking head

37 | 49 HP (S1)
2.5° x 2.5° / 0.001° x 0.001°
5000 / 6000 / 7000 min⁻¹

Orthogonal head

37 / 46 kW | 49 / 61 HP (S1)
1° x 1°
6000 / 7000 min⁻¹

5-axis continuous head

Up to 60 kW | 80 HP (S1)
0.001° x 0.001°
Up to 7000 min⁻¹ (mechanical) /
Up to 30000 min⁻¹ (electrospindle)

Fixed Horizontal Boring Head

43 / 46 / 60 kW | 57 / 61 / 80 HP (S1)
4000 / 5000 min⁻¹

Quill

Ø 130 / 150 mm | 5" / 6"
40 / 53 / 54 kW | 53 / 71 / 72 HP (S1)
3500 min⁻¹
Available in FP and FS models



Orthogonal Head

Compact design, conceived for machines with inline motor.

- Inverse machining capacity: up to -45°
- No additional set-ups.
- Improved cycle time.
- Better finishing quality.
- Minimum manipulation.
- Full advantage of machine travel.
- Same distance from spindle to table during lateral and front milling.

Head changing system

- Rapid.
- Accurate.
- Applicable to any head.
- Universal system: heads are fully standard.
- No downtimes: head's pick-up fully covered to protect inductive detectors from chips and coolant.
- Available for FP and FS models.

Fully modular system through adapter flanges.





06.

Multitasking

All in one: milling, turning, grinding and gear cutting in a single machine.



- Improved machining accuracy and overall part quality.
- Significant reduction in production lead time.
- Cost benefits: fewer fixtures, tools and labor requirements.
- Single machine investment for multiple processes.
- Optimized use of floor space.
- Machining of several morphologies, sizes and complexities.
- Improved precision due to minimum workpiece set-ups.
- Fewer operators involved in the machining process.


Milling & Turning Tables

< Ø 2000 mm 78"	Ø 2000 ÷ 3500 78" ÷ 137"
up to 15 Tn 33069 lb	up to 40 Tn 88184 lb
up to 400 min ⁻¹	up to 150 min ⁻¹
Torque motor	Roller bearing
	Double pinion and crown system, high precision, no backlash

High Torque Multitasking Head

Head and spindle orientation at any angle.


- Standard tools, no adapter needed.
- Automatic tool changing system.
- Standard range, availability of spare parts.
- Ease of use thanks to specific positioning cycle.
- 37 | 49 HP (S1)
- Up to 1222 Nm | 10815 in*lb^f
- 5000 / 6000 / 7000 min⁻¹
- 2.5° x 2.5° / 0.001° x 0.001°

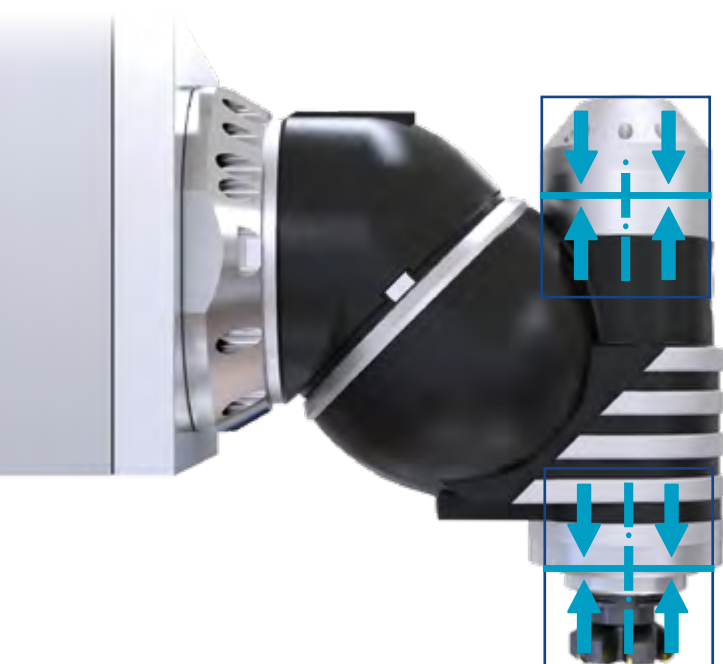

Mechanical transmission head with spindle clamping system: includes a clutch to clamp the spindle at any angle during turning operation.

The clamping system prevents bearing damage thanks to an internal retractable support ring.

Grinding capability

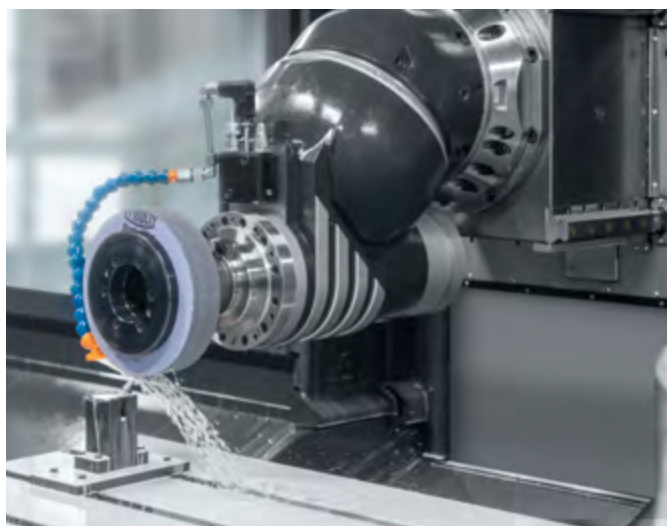

- Table mounted dressing unit.
- Wheel holder with integrated nozzle.
- Balancing unit.
- Full splash guarding.
- Fume extraction.
- Specific cooling system.
- Double protection for guideways and telescopic.
- Grinding cycles and functionalities by Soralue Software Factory.

07.

Soraluce Software Factory

Smart HMI, Intelligent interface.

- Ergonomic and intuitive workspace.
- Soraluce's APPS available.
- Parallel work during NC program running.
- Minimized downtimes.
- Real time machine status.
- Energy consumption monitoring.
- Simplification of repetitive tasks.

Home
Made

01

Modular and robust;
configurable according
to customer's
requirements.

02

Own methodology;
complete integration,
approved in Soraluce.

03

Development of specific
custom cycles.

04

Capability for automated
system, flexibles
lines, centralized tool
magazines.



Softkeys &
Customized
masks



Manufacturing
cycles



Dynamic collision
monitoring



Advanced tool
management

08.

Digital services



Advanced Digital Services, based on the Soraluce Data System comprehensive monitoring platform:

Reportya

Regular customized reports.

FactoryConnect

Machine park monitoring and integrations with corporate management systems (ERP, MES, etc.).

Autocheck

Self-Assessment using Fingerprint benchmark parameters.

JobManager

Traceability of manufacturing orders, programs, tools and process incidences.

Emaintenance

Digital management of maintenance tasks.

OEEMonitor

Availability & Performance & Quality parameters calculation.

09.

Ergonomic & Safe

Tool changing system

Tool loading non-stop machining

- Simple and ergonomics.
- Allows tool loading/unloading with machine in operation.
- Full safety for the operator.
- No downtimes:
 - Tool storage is protected from chips and coolant.
 - Inductive detectors protected.
- Advanced tool management options available on request.

Totally reliable

- NC controlled.
- No impacts with head.
- Tool control.

Non-stop machining

Robotized tool
changer available



Easy maintenance and accessibility



01

Accessible intervention areas.

02

Specific signals to indicate maintenance and service points.

03

Sliding shutters and doors to avoid the disassembly of panels.

04

Visible gauges and levels.

05

Ample areas to ease maintenance tasks.

06

Protection of the critical areas of the equipment.

07

Operator platform and access to machining area. Vertical movement available for FP and FS models (option).

08


Machine grease lubrication; consumption is kept to the minimum necessary.

Comfort pack

Focused to increase operator's comfort and productivity.

- Folding seat.
- Sound system.
- Extra space.
- Air conditioning (optional).
- Workbench with a panel (optional).
- Tool cabinet (optional).




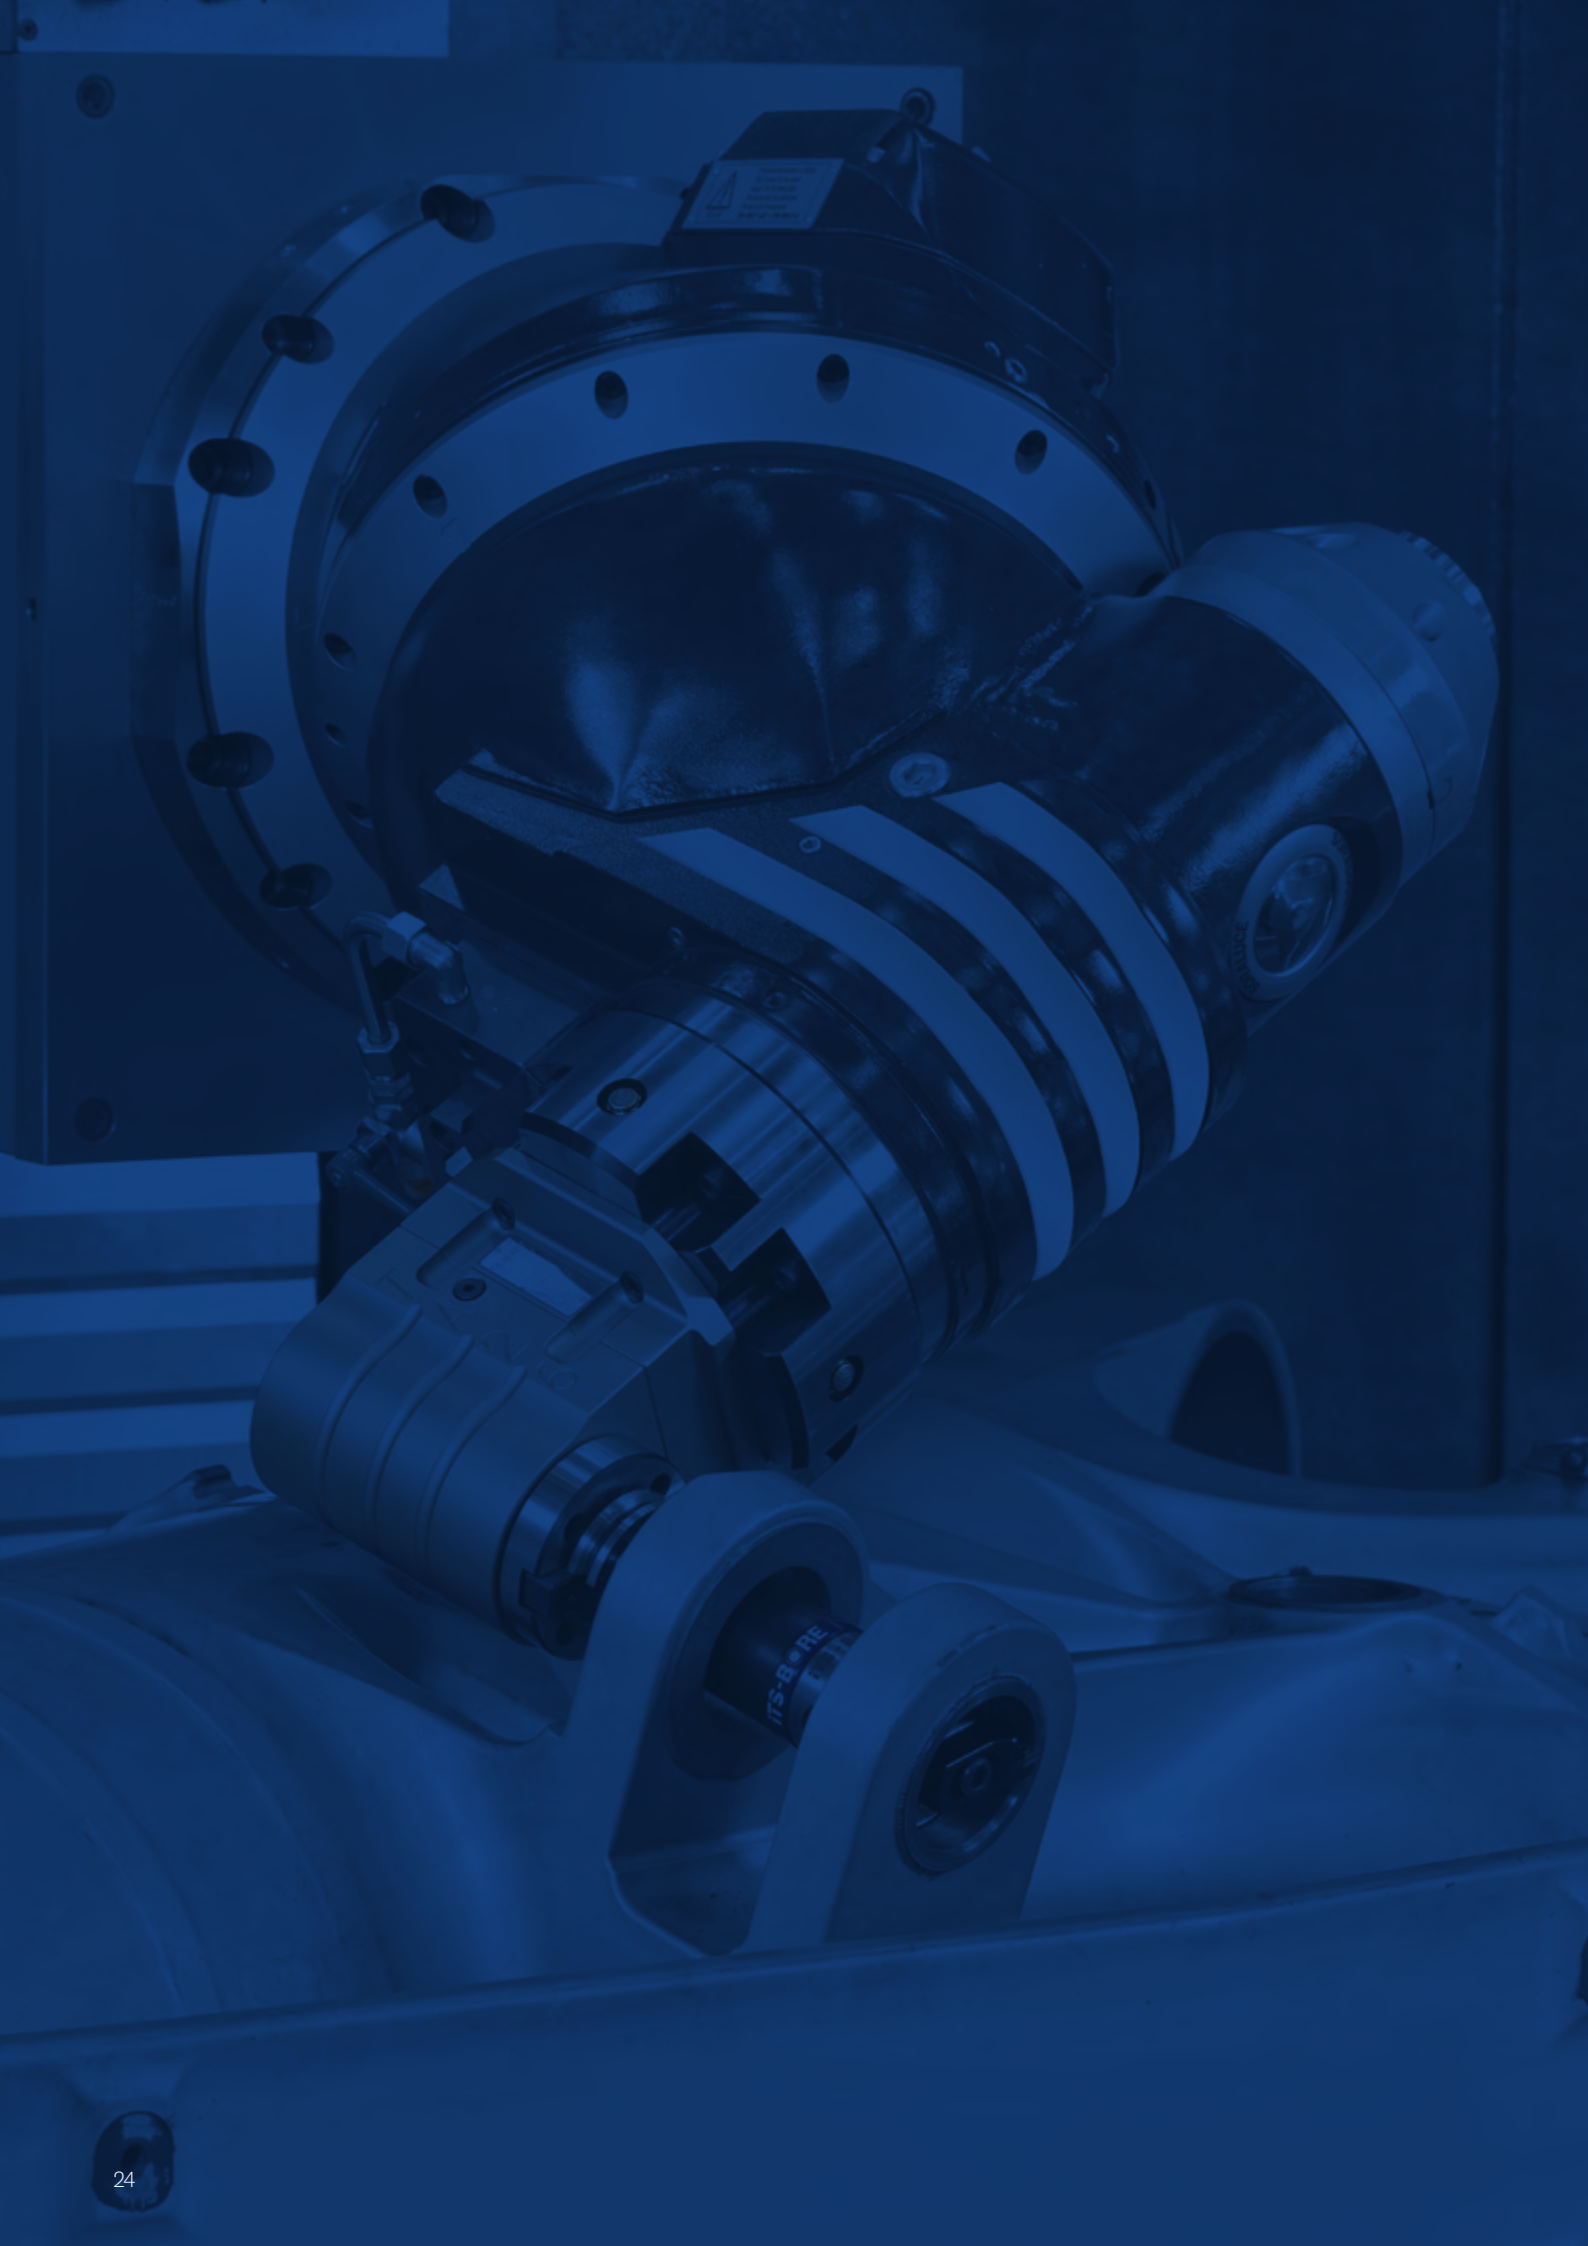

Meet
the machines

Productivity Line


Best stock removal rate!

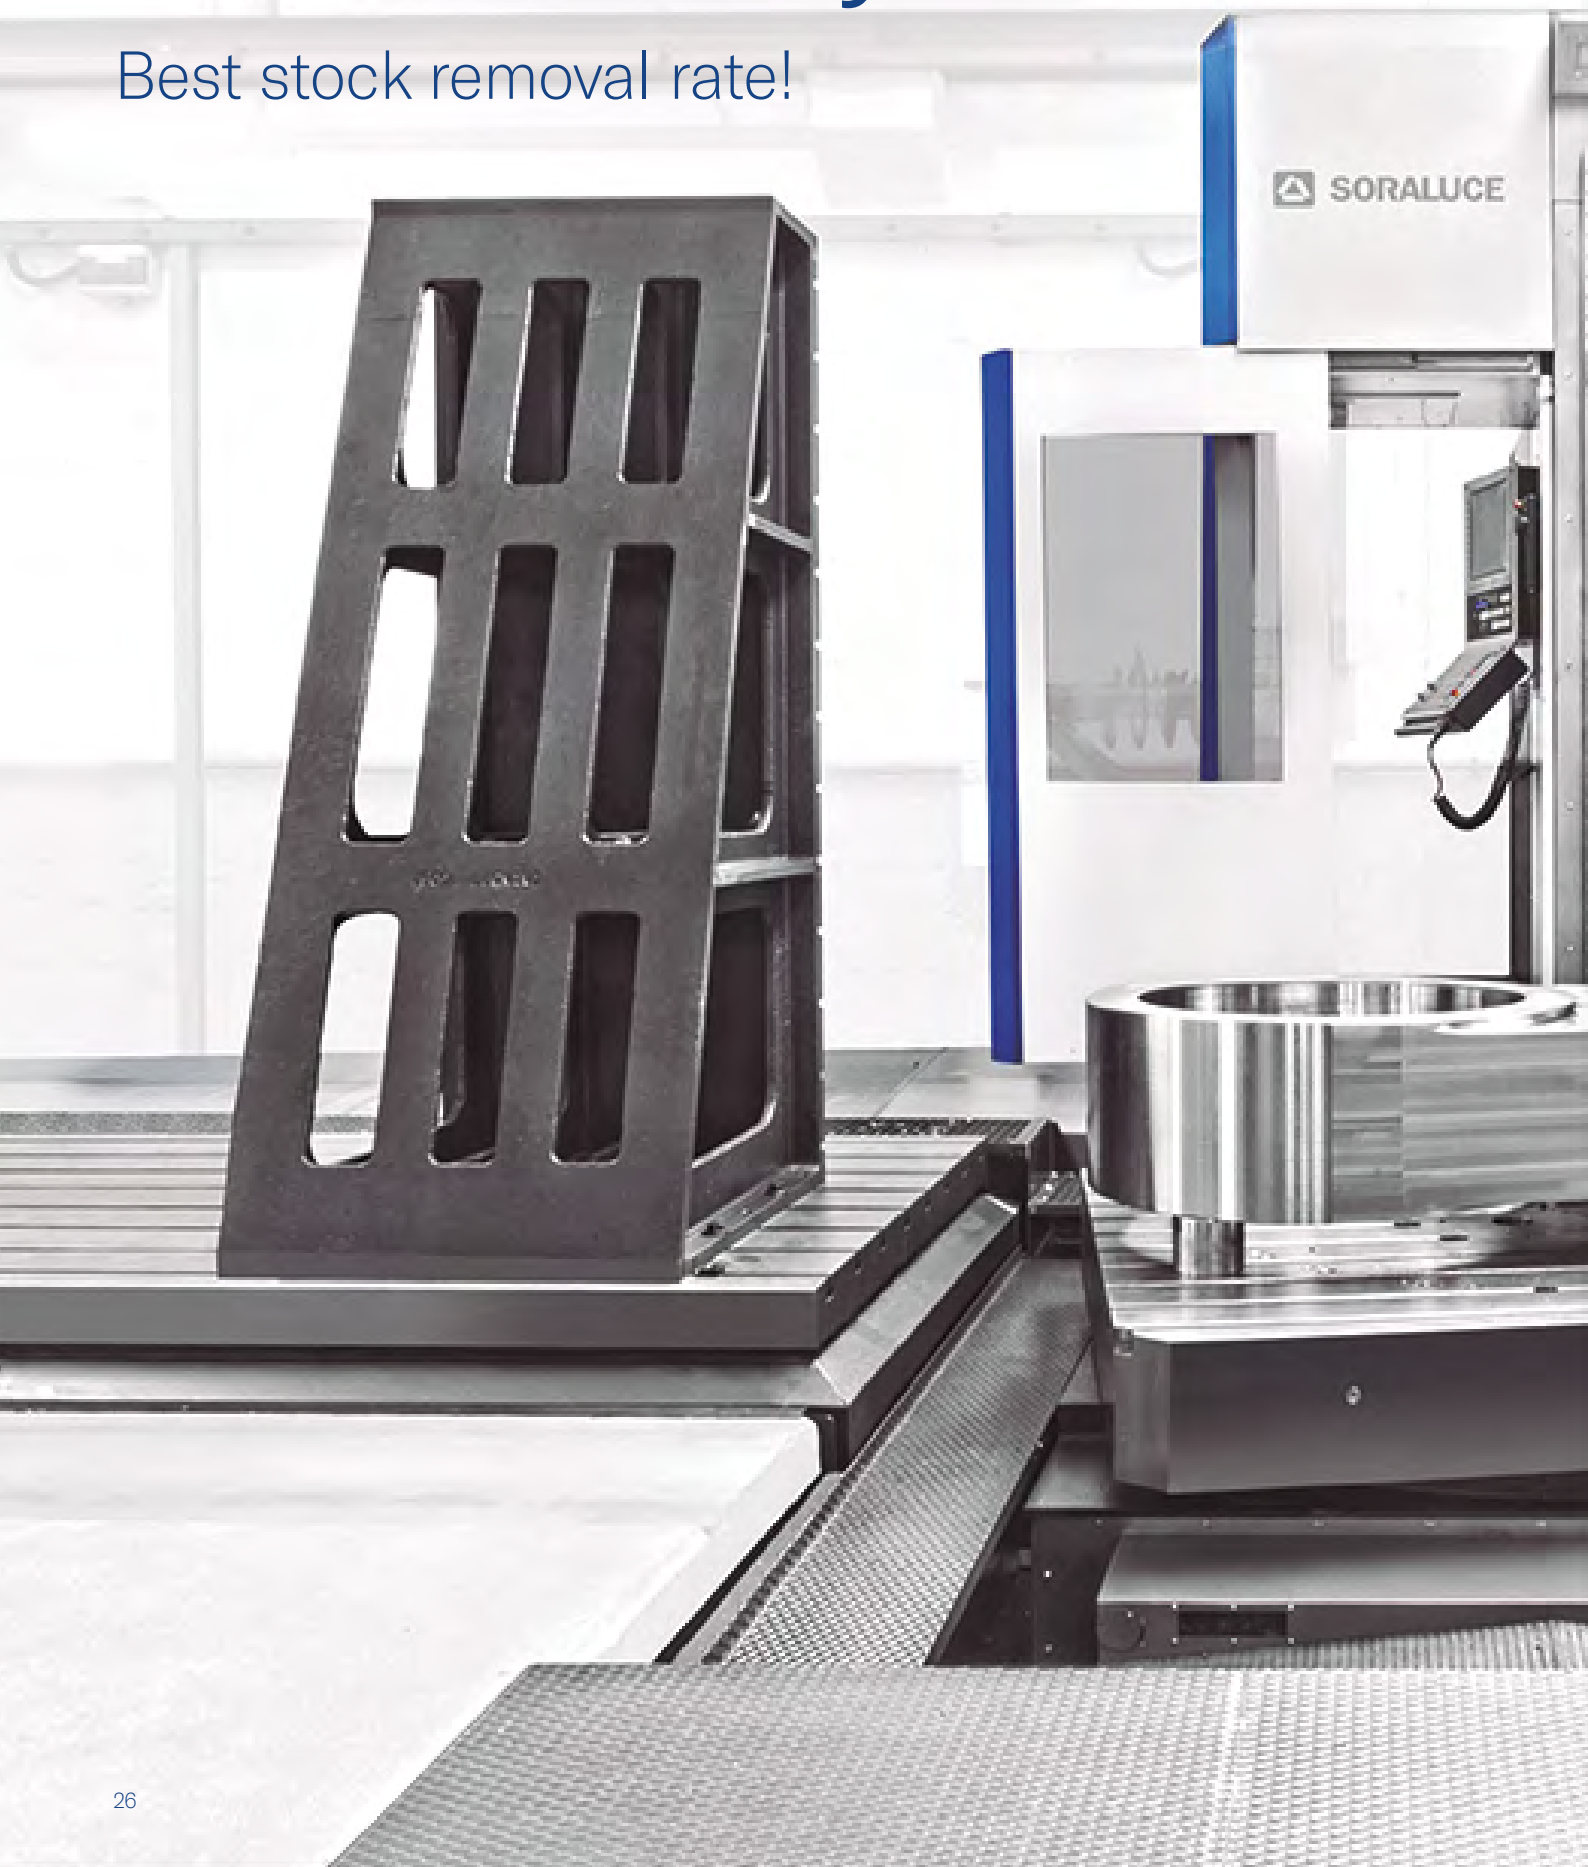




Choose the configuration of your machine


A versatile range

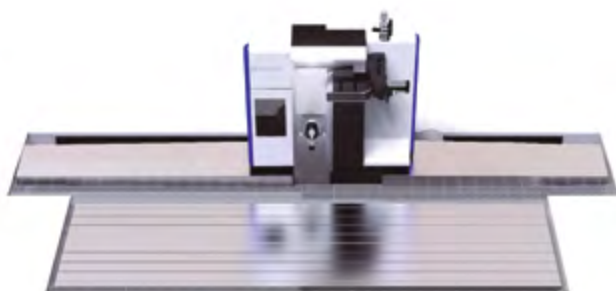


Basic configuration
Floor plate

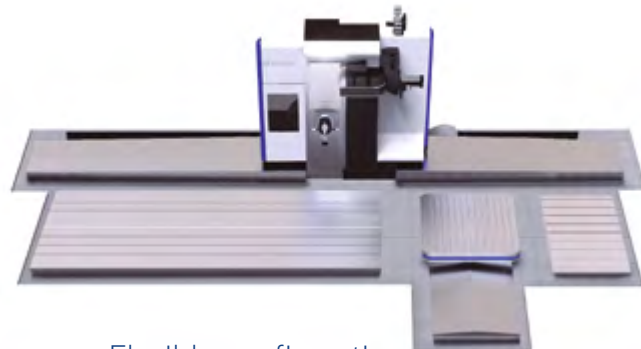

Flexible configuration
Minimum workpiece set-ups

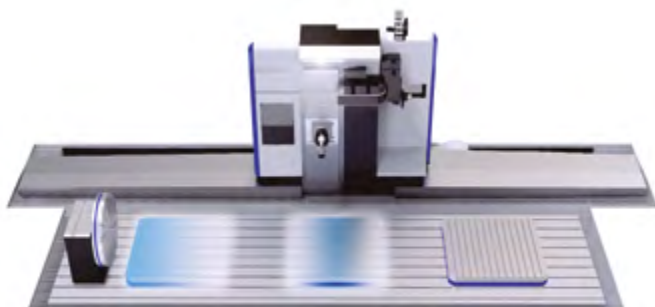


In & out
Portable rotary table

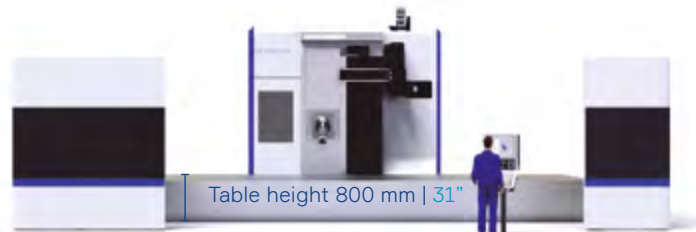

Ergonomic
Table at operator's height



Pendulum
machining




Several
workstations



Palletized
and flexible
manufacturing
systems

Automated Solutions

- Maximum efficiency.
- Reduction of set-up times.
- Downtime are minimized.
- Avoid human errors.

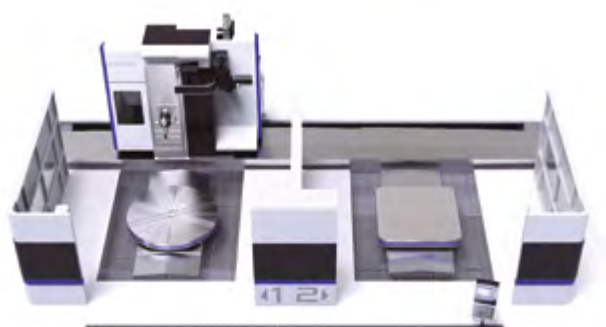

Multitasking configuration

Milling and turning workspaces



Duplex Machine

- Double production.
- Improvements in part precision; machining of the part in one single setup.
- One sole operator can control both machines.
- Reduced space.
- Fastest ROI due to high productivity.
- Different configurations available:
 - Single working area.
 - Pendulum working areas.
 - Pallet changing system.
- Duplex Pack by Soraluze Software Factory.



Duplex machine

Working with two simultaneous spindles

Features

FLP | FP | FS

Technical characteristics

		FLP	FP	FPW	FS	FSW
Longitudinal traverse "X" axis	mm in	3000 118" ÷ as per request	4000 157" ÷ as per request		4000 157" ÷ as per request	
Vertical traverse "Y" axis	mm in	1800 / 2200 70" - 86"	2600 / 3200 102" / 126"		3600 / 4000 141" / 157"	
Cross traverse "Z" axis	mm in	1300 / 1600 51" / 63"	1600 63"	1000 / 1500 39" / 59"	1600 63"	1000 / 1500 39" / 59"
Quill diameter	mm in	-	-	130 / 150 5" / 6"	-	130 / 150 5" / 6"
Quill cross traverse "W" axis	mm in	-	-	700 / 800 27" / 31"	-	700 / 800 27" / 31"
Spindle power	kW HP	43 49	43 / 60 57 / 60	40 / 41 / 53 / 54 53 / 55 / 71 / 72	43 / 60 57 / 60	40 / 41 / 53 / 54 53 / 55 / 71 / 72
Spindle speed range	min ⁻¹	6000 / 7000		3500	6000 / 7000	3500
Rapid traverse	mm/min in/min	35000 1378				
Tool magazine	No. Tools	40 / 60 / 80	40 / 60 / 8 / 100 / 120			

Technology at your disposal

■ Basic machine ■ Optional


	FLP	FP	FPW	FS	FSW
Full cast iron	■	■	■	■	■
Linear guiding & Damping Pads	■	■	■	■	■
Inline spindle motor	■	■	■	■	■
Monoblock	■	■	■	■	■
DAS+	■	■	■	■	■
Double pinion and rack	■	■	■	■	■
Heads with air oil lubrication	■	■	■	■	■
Heads with cooled oil lubrication		■	■	■	■
5-axis continuous head	■	■	■	■	■
Quill			■		■
Automatic head changing system	■	■	■	■	■
Ram Balance		■	■	■	■
Multitasking	■	■	■	■	■
Comfort pack	■	■	■	■	■
Soraluce Smart HMI	■	■	■	■	■

Set & Go


Less footprint in the workshop. Less expensive foundation. Easy transport & installation.

With or without pit


Ground level

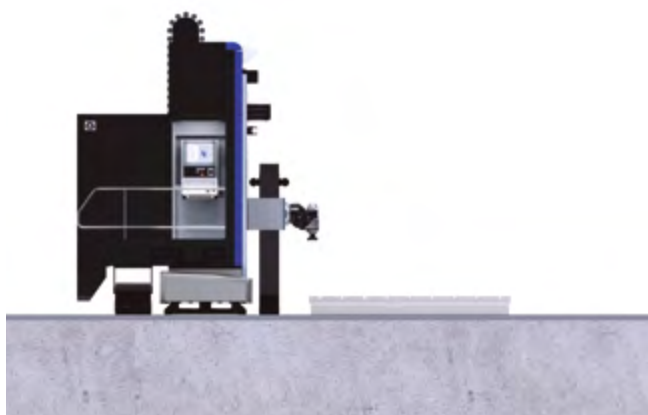

Pit

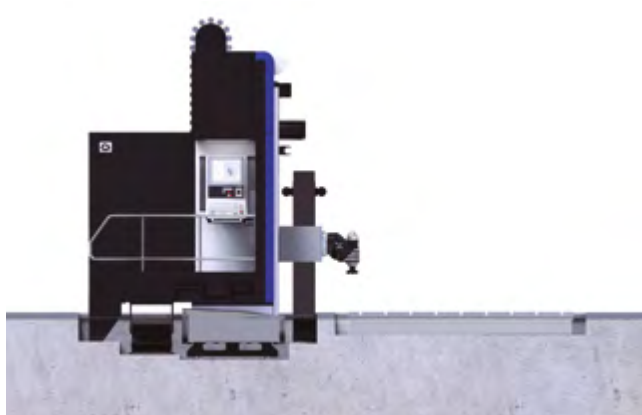

Layout

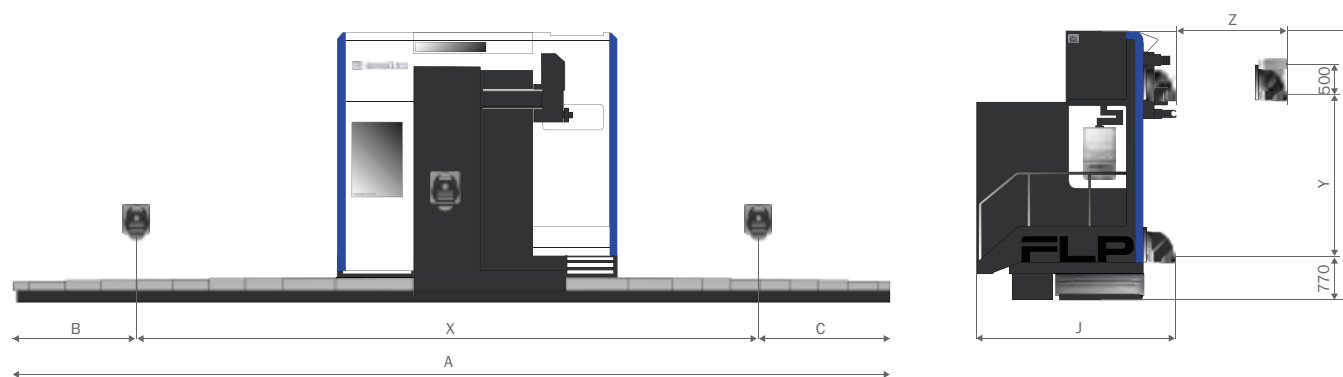


Layout	X	Y	Z	A	B	C	H	J
FLP 30	3000 118"	1800 / 2200 70" / 86"	1300 / 1500 51" / 63"	8790 346"	2230 87"	3570 140"	3880 / 4280 152" / 168"	3235 / 3485 127" / 137"
FLP 140	14000 551"			20270 798"	2470 97"	3810 149"		
FP 40	4000 157"	2600 / 3200 102" / 126"	1000 - 1500 (with quill) / 1600 39" - 59" (with quill) / 63"	9790 385"	2230 87"	3570 140"	4690 / 5290 184" / 208"	4170 164"
FP 140	14000 551"			20270 798"	2470 97"	3810 149"		
FS 40	4000 157"	3600 / 4000 126" / 157"		9790 385"	2230 87"	3570 140"	5700 / 6100 224" / 240"	
FS 140	14000 551"			20270 798"	2470 97"	3810 149"		

Values for machine with Universal Head H206 and Z: 1600 mm | 63".
Dimensions in mm | in.

Applications


FLP

Industrial Vehicles / Frame

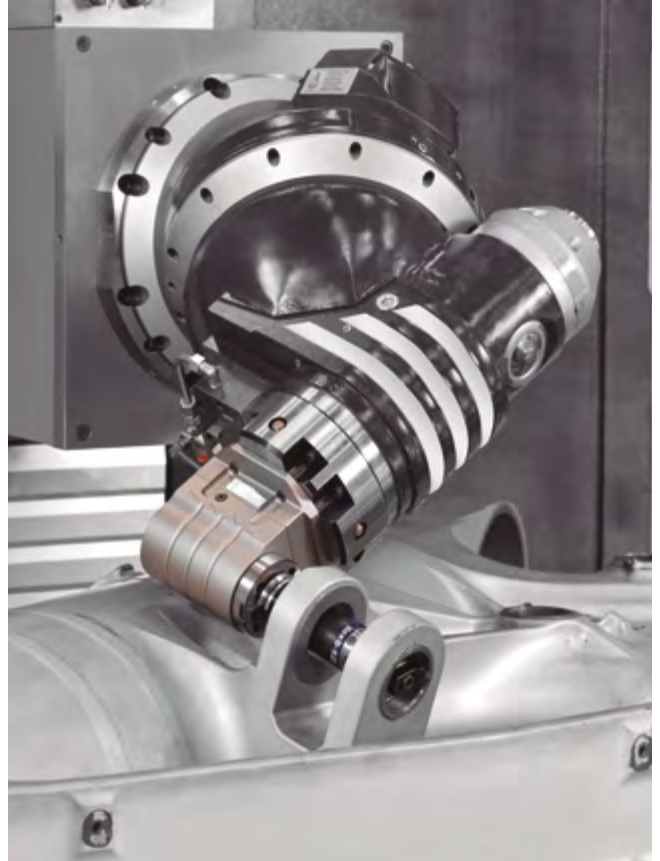

FLP

Aerospace / Landing gear

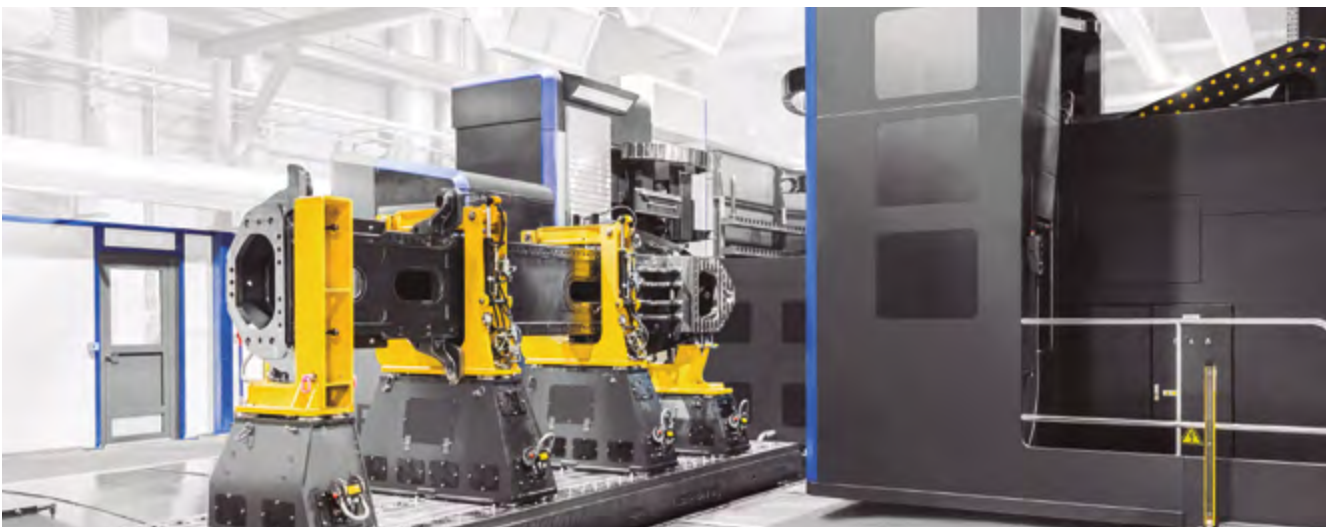

FP


Forest Machinery / Frames



FS
General Engineering



FLP
General Engineering

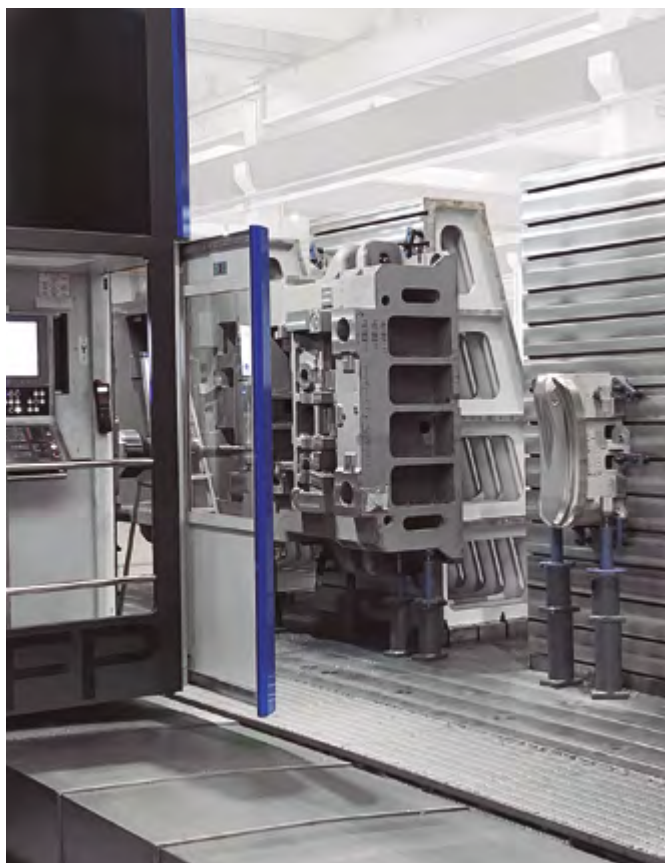

FS
Energy / Axle




FP
Machine Tools / Frames




FP
Oil & Gas / Valves



FS
Energy / Axle

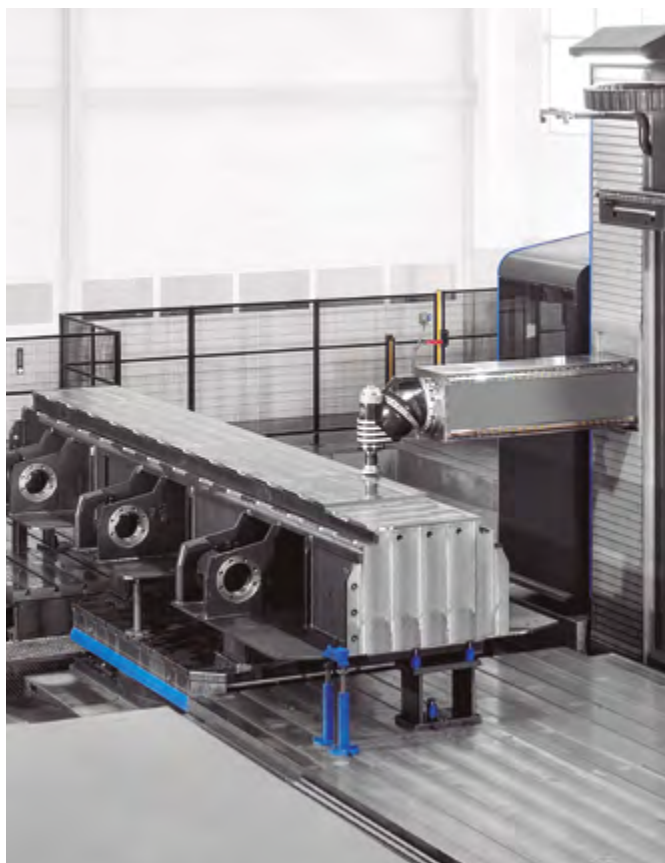

FP
Machine Tools

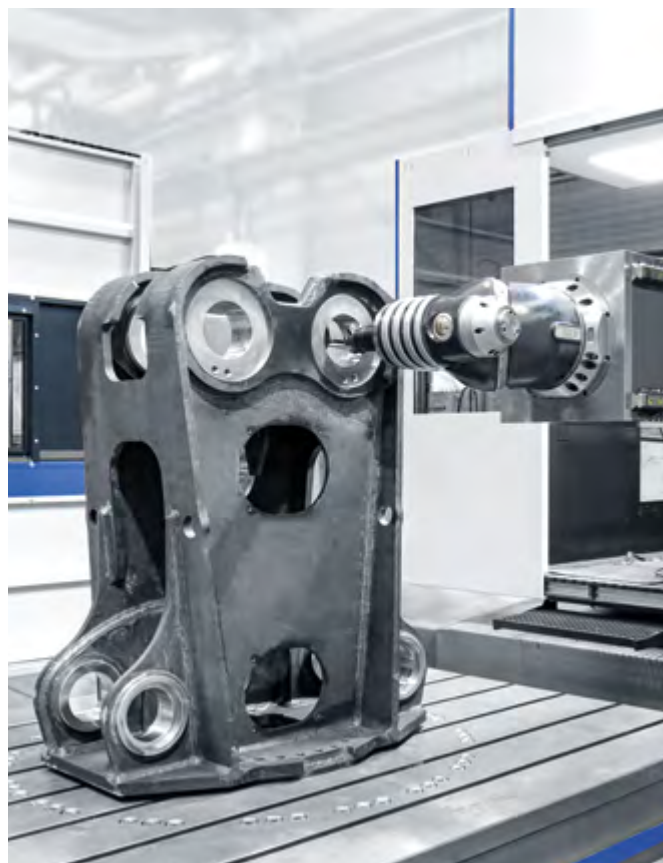

FP
Industrial Vehicles / Yellow Goods





There is only one first

Soraluce

Osintxu Auzoa - E-20570 Bergara (Gipuzkoa) - Spain
+34 943 76 90 76

www.soraluce.com

DANOBATGROUP

