



**TSUGAMI**  
AMERICA

# B0126-V

## CNC PRECISION AUTOMATIC LATHE

- 12mm Capacity Swissturn
- 27 Tool Positions
- Chucker Convertible
- Increased Main and Back Spindle Power
- FANUC 0i-TF Plus CNC Control

[tsugamiamerica.com](http://tsugamiamerica.com)

# B0126-V

## 6-AXIS VERTICAL GANG TOOL SWISS CNC LATHE

### SPEED

- The B0126-V features a state of the art FANUC control for low idle times and high speed cutting.
- Your B0126-V is our fastest 12mm machine! The main and back spindle are rated up to 12,000 rpm.
- The horizontally opposed gang tool layout offers the shortest tool path and therefore, the quickest possible chip to chip time.
- Your B0126-V is designed with a modular tool zone capable of thread whirling, angular drilling and milling.

### ACCURACY


- Tsugami has long been known for machine accuracy over time. The symmetrically designed castings, spindle cooling, A-frame design of the gang slide and thermal compensation on some models all work in concert to provides long term repeatable accuracy.

### RIGIDITY


- The Tsugami B0126-V is built for the long haul. It features rugged construction, massive base and axis castings, belt free integral motor spindles, live tools, and integral motor drive bushing.
- Built on a heavy duty one piece cast iron base with thermally symmetrical construction, this machine features 0.1 micron axis resolution. A more rigid platform allows higher speeds and feeds.
- For extra peace of mind, the machines, motors, and FANUC controls are covered by an industry leading two-year parts and service warranty.




B0126-V Tool Zone

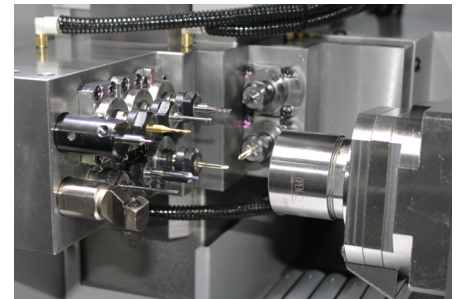

B0126-V Backworking Block

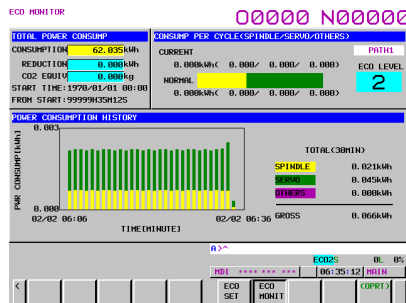


Tsugami ECO Mode

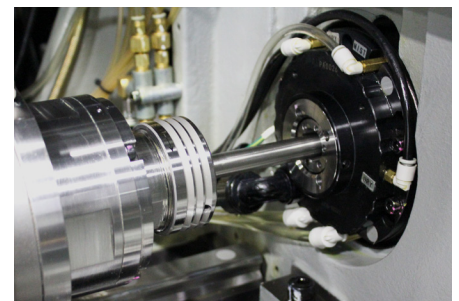


Servo Driven Guide Bushing

# WORK ZONES & MODULAR TOOLING

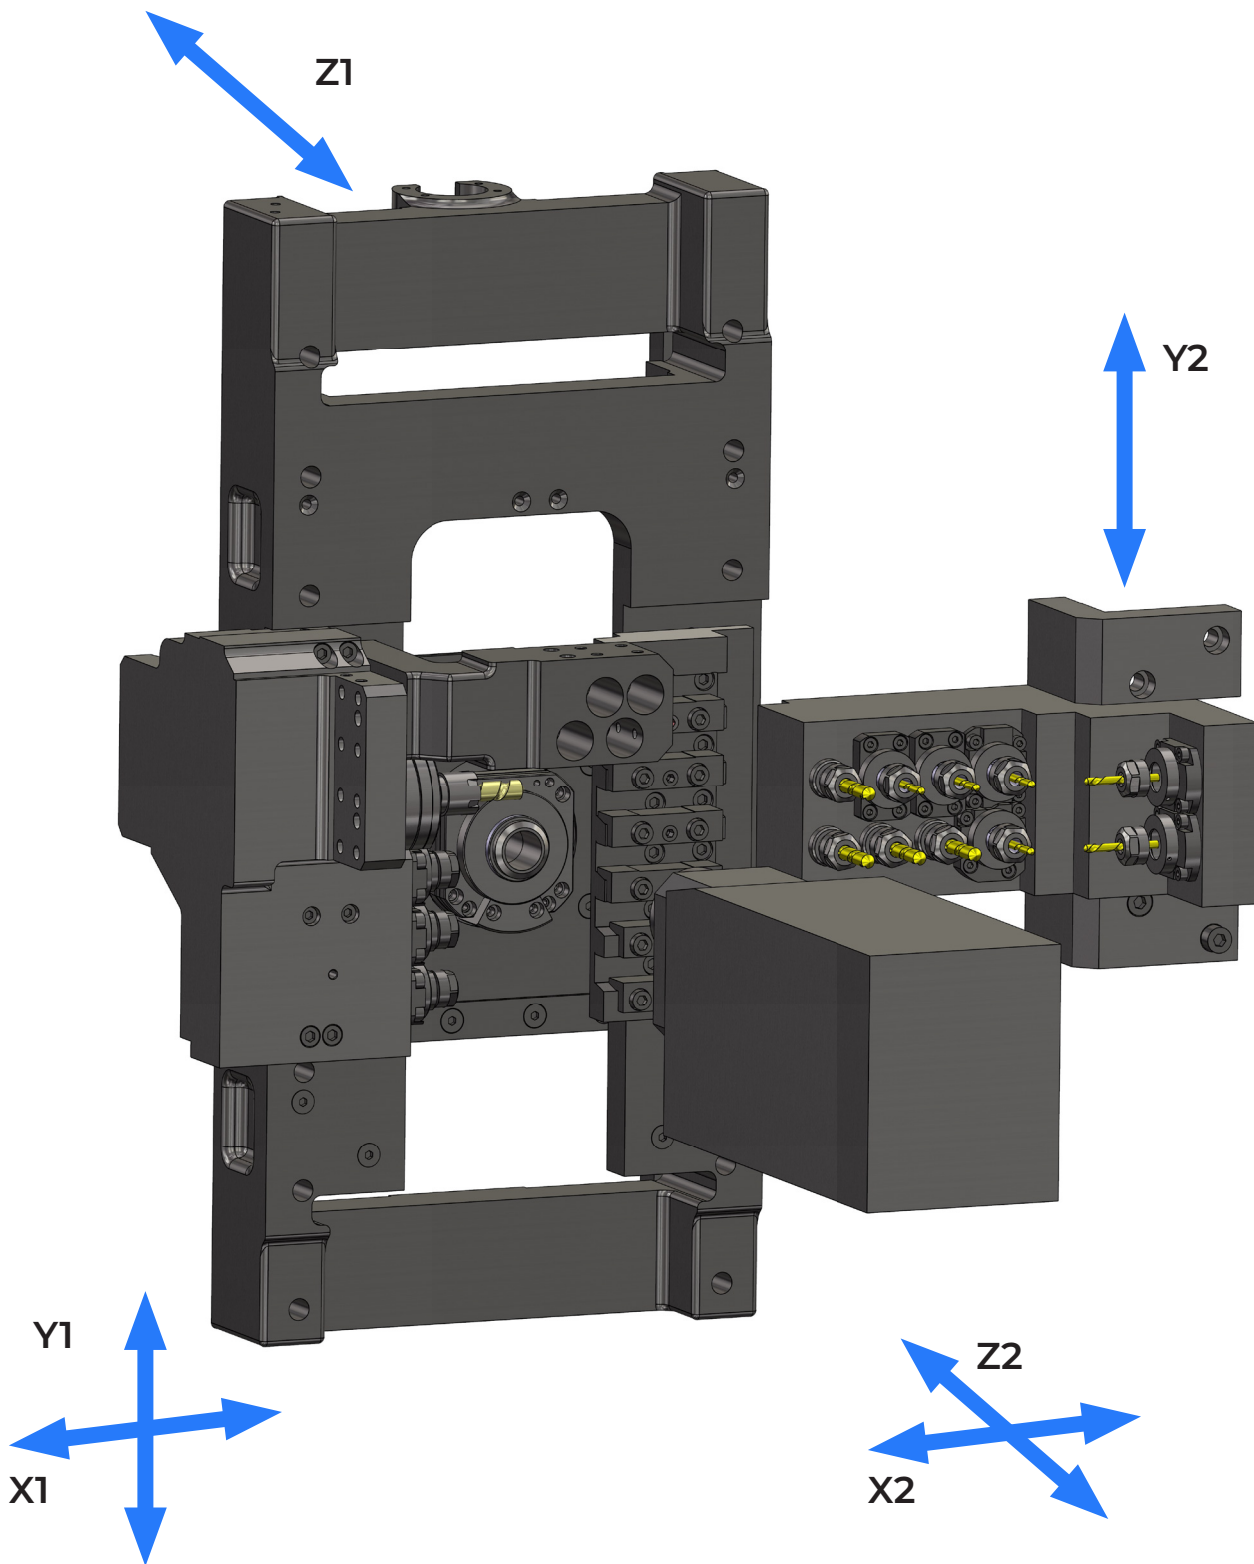


# CHUCKER CONVERTIBLE

The B0126-V can be changed over in minutes. Adding a Chucker Kit allows you to convert your B0126-V from a traditional sliding headstock Swiss function to standard lathe-type chucker mode. This allows you to run high precision parts utilizing standard drawn barstock. Other benefits include shorter remnant, better concentricity and more. This quick-change flexibility makes these machines ready to tackle whatever job comes in the door.

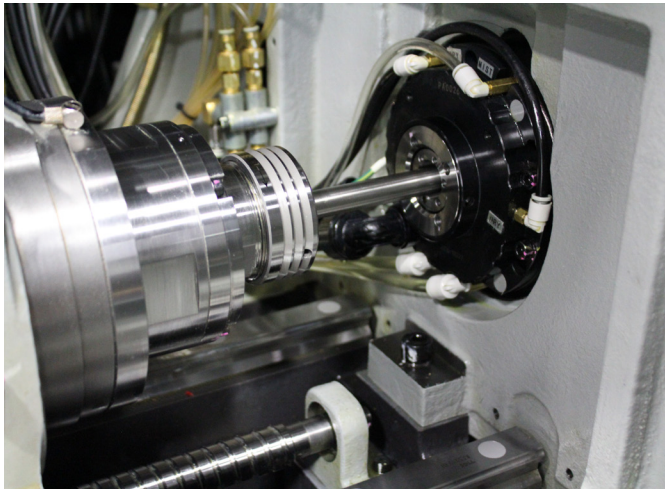

Running in Swiss Mode

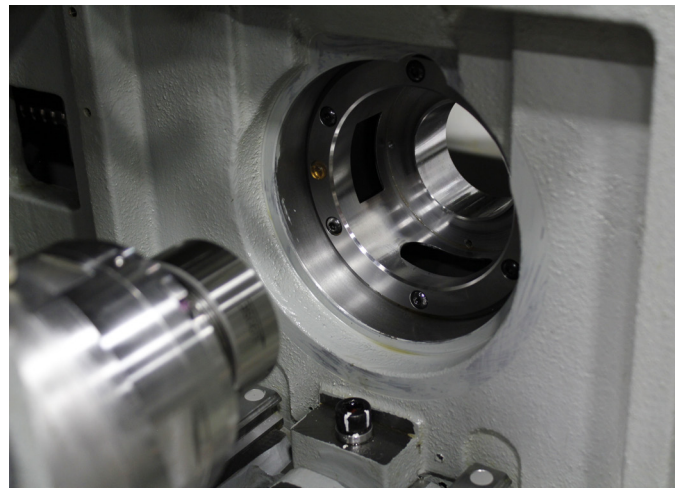

Running in Chucker Mode

From the machine Make Ready process, to integrating mechanical and robotic loading and unloading systems, to custom tool creation and spindle repair, IMG is dedicated to supporting all Tsugami users in North America!



Grinding Room



Make Ready Facility




Milling Room


# OSCILLATION CUTTING

Oscillation Cutting is a technological breakthrough that oscillates a servo axis to break chips in tough to cut materials, reduces heat in the cut, while not diminishing tool life.

- Productivity is increased by reducing operator interruption to remove hanging or bird nesting chips.
- Easy to program by special G code
- Oscillation parameters can be changed easily within the program for machining multiple features with multiple tools.
- Can be used for many machining operations including OD turning, drilling, boring, grooving, cutoff, circular interpolation, and most FANUC canned cycles.




**WITHOUT  
OSCILLATION**




**WITH  
OSCILLATION**

## ABILE SOFTWARE

- Developed by Tsugami, Abile is capable of programming moderately complex machined parts. Abile incorporates all basic machines featured and several material types with predetermined feed rates.
- Abile allows first time users to quickly become proficient with Swiss processing despite having limited knowledge. Abile comes free with your machine purchase and requires no license fees, maintenance agreements, or seat limitations.
- Abile allows you to generate a 2 or 3-path part program, complete, with specific and editable codes in standard FANUC G Code format. Abile automatically generates machine process and provides component run times.

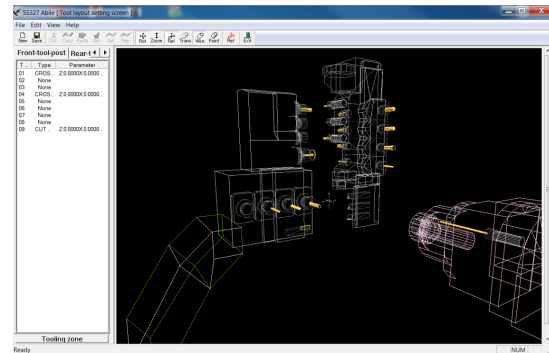

Program Generator

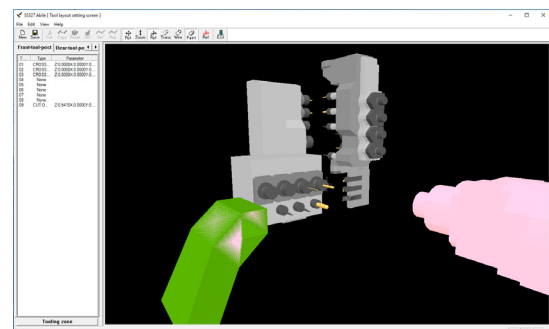

Tool Setting

# MACHINE STANDARD SPECIFICATIONS


	ITEMS	B0126-V
MACHINING RANGE	Max. Chucking Barstock Diameter	Ø3 mm to Ø12.7mm (.12 in. to .5in)
	Max. Machining Length	<b>170 mm (6.79 in.) (Direct-drive rotary guide bushing)</b> 45 mm (1.87 in.) (Guide-bushless) 210 mm (8.27 in.) (Stationary guide bushing) 80 mm (3.15 in.) (Carrier type rotary guide bushing)
	Max. Drilling Diameter	Ø10 mm (.39 in.)
	Max. Tapping Diameter	M8
	Max. Back Spindle Chucking Barstock Diameter	Ø12.7 mm (.5 in.)
	Max. Back Spindle Drilling Diameter	Ø10 mm (.39 in.)
	Max. Back Spindle Tapping Diameter	M10
	Max. Tool Spindle Drilling Diameter	Ø6 mm (.24 in.) (Front tool post/Back tool post)
	Max. Tool Spindle Tapping Diameter	M5 (Front tool post/Back tool post)
	Max. Tool Spindle Slotting Cutter Diameter	Ø30 mm (1.2 in.) (Front tool post)
MACHINING CAPABILITY	Main Spindle Speed	Max. 12,000 min <sup>-1</sup> (Rated speed: 10,000 min <sup>-1</sup> )
	Back Spindle Speed	Max. 12,000 min <sup>-1</sup> (Rated speed: 8,000 min <sup>-1</sup> )
	Rotary Guide Bushing Speed	Carrier type *1: Max. 8,000 min <sup>-1</sup> (Rated speed: 6,000 min <sup>-1</sup> ) Direct-drive type *1: Max. 12,000 min <sup>-1</sup> (Rated speed: 8,000 min <sup>-1</sup> )
	Live Tool Speed	Max. 8,000 min <sup>-1</sup> (Rated speed: 5,600 min <sup>-1</sup> )
	Tool Storage Capacity (Standard)	27
	Tool Size	.5 x .5"
	Rapid Traverse Rate	36m/min (X2, Z2), 32m/min (Y1,Z1), 24m/min (X1), 15m/min (Y2)
MOTORS	Main Spindle	3.0/5.0 Hp (2.2/3.7 kW)
	Back Spindle	3.0/5.0 Hp (2.2/3.7 kW)
	Linear Axes	0.5 kW (Z1: 0.75 kW)
	Live Tool	1.0 kW (Front tool post) 0.75 kW (Back tool post)
	Coolant Pump	0.3Hp (0.25 kW)
	Lubricating Pump	3 W
OTHER	Compressed air requirement	0.4 MPa or above
	Air discharge rate	100 NL/min
	Power Source Requirements	13.1 kVA
	Coolant Tank Capacity	180L
	Width x depth x height	1,750 x 1,055 x 1,700 mm 68.9" x 41.5" x 66.9"
	Weight	1,850 kg (4,078 lbs.)

# NC SPECIFICATIONS

## ITEMS

## B0126-V

NC Unit	FANUC Oi-TF Plus
Controlled Axis	X1, Z1, Y1, X2, Z2, Y2, C1, C2
Least Input Increment	0.0001mm (X-axis in diameter)/0.001 deg
Maximum Programmable Value	±8 digits
Interpolation Method	Linear/circular
Feedrate Function	1 - 6,000 mm/min
Feedrate Override	0 to 150%, 10% step
Dwell	G04, 0 to 99999.999
ABS/INC Command	X, Z, Y, C: Absolute U, W, V, H: Incremental
Number of Tool Offset	Main: 64 Back: 64
LCD/MDI	10.4" color LCD
Display Language	English
Part Program Storage	2 Mbyte (sum of main and back)
Registerable Programs	1,000 (sum of main and back)
Miscellaneous Functions	Main: M5-digits Back: M3-digits
Spindle Function	S Code 5 digits
Tool Function	T Code 4 digits

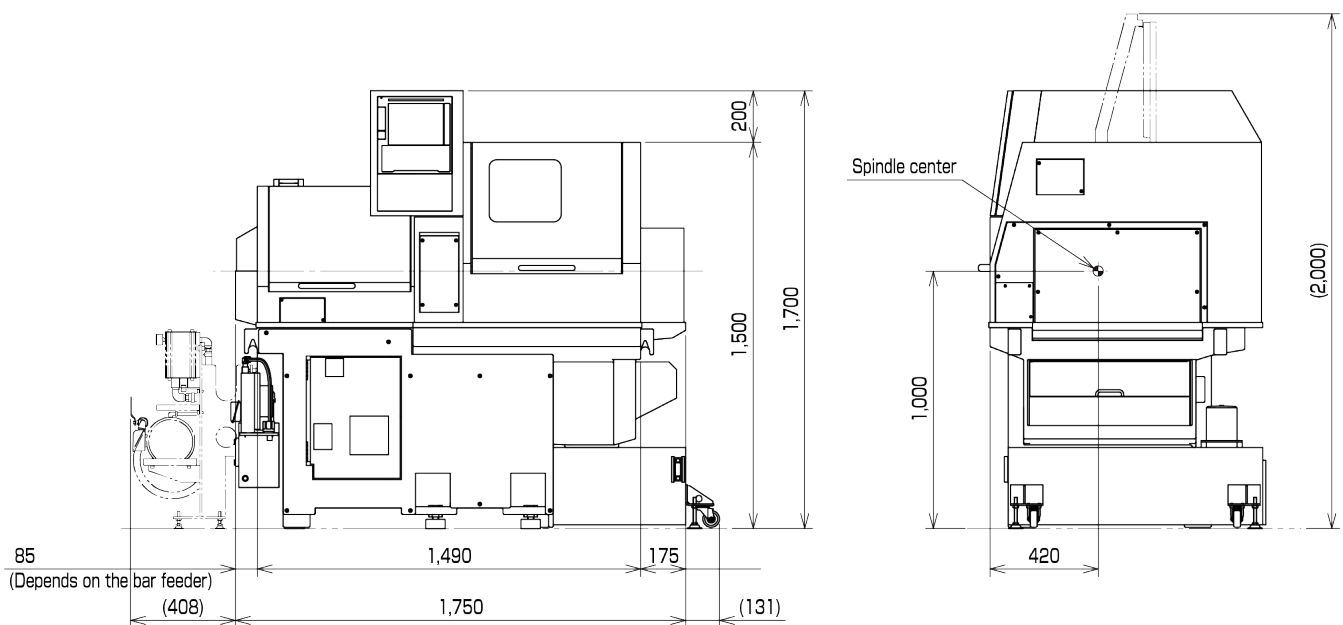

Since 1978, Tsugami America (formerly known as Tsugami/Rem Sales) has been the exclusive source for Precision Tsugami CNC machine tools in North America. Headquartered in Windsor, CT, Tsugami America provides machine tools and engineering expertise through an extensive network of authorized distributors and technical centers. Technical support and customer service are available throughout North America. Our distributors' trained service personnel provide technical support throughout the long life-cycle of our Tsugami machine tools, and work hand-in-hand with Tsugami America's engineers to deliver common-sense solutions to everyday problems.

Our application engineers help customers tackle and solve the toughest high-precision manufacturing challenges, on-time and on-budget. We have a 40-year history and reputation of serving the needs of small parts manufacturers in North America with the highest level of expertise and customer care. Our industry-respected, knowledgeable staff is comprised of both long-time employees and fresh faces all who share a commitment to provide you, our customers, with the competitive advantage to "do more with less" every day.

## DISTRIBUTION NETWORK

### **The Robert E. Morris Company**

Serving: CT, MA, RI, NH, VT, ME, NY, NJ  
[www.robertemorris.com](http://www.robertemorris.com)

### **Morris Midwest Wisconsin & Illinois**

Serving: WI, IL, MI Upper Peninsula  
[www.morrismidwest.com](http://www.morrismidwest.com)

### **Methods & Equipment Associates**

Serving: MI  
[www.methods-equipment.com](http://www.methods-equipment.com)

### **Ellison Technologies**

Serving: CA, WA, OR, NV  
[www.ellisontechnologies.com](http://www.ellisontechnologies.com)

### **Protecnic de México, S.A de C.V.**

Serving: Mexico  
[www.protecnic.com.mx](http://www.protecnic.com.mx)

### **Morris South**

Serving: NC, SC, GA, VA, AL, MS, TN, AR, FL  
[www.morrissouth.com](http://www.morrissouth.com)

### **Morris Great Lakes**

Serving: NY, PA, WV  
[www.morrisgreatlakes.com](http://www.morrisgreatlakes.com)

### **Technical Equipment Sales Co**

Serving: OH, IN, KY  
[www.techequip.com](http://www.techequip.com)

### **Hartwig, Inc.**

Serving: MO, IL, IA, KS, CO, OK, TX, LA, MT, UT, NM, ID, WY  
[www.hartwiginc.com](http://www.hartwiginc.com)

### **Morris Midwest Minnesota**

Serving: MN, ND, SD  
[www.morrismidwest.com](http://www.morrismidwest.com)

### **Precision 360**

Serving: FL, PA, NJ, DE, MD  
[www.precision360.com](http://www.precision360.com)

### **Arizona CNC**

Serving: AZ, NV  
[www.arizonacnc.com](http://www.arizonacnc.com)

### **EMEC Machine Tools Inc.**

Serving: Eastern Canada  
[www.emecmt.com](http://www.emecmt.com)

### **Thomas Skinner**

Serving: Western Canada  
[www.thomasskinner.com](http://www.thomasskinner.com)

## TSUGAMI AMERICA LOCATIONS

### **WINDSOR, CT**

651 Day Hill Road  
Windsor, CT 06095

### **FORT WAYNE, IN**

4501 Earhart Drive, Suite B  
Fort Wayne, IN 46809

### **BROOKLYN PARK, MN**

9495 Winnetka Avenue N, Suite 100  
Brooklyn Park, MN 55445

### **FULLERTON, CA**

1521 E Orangethorpe Ave, Suite E  
Fullerton, CA 92831

860-687-3400 | [www.tsugamiamerica.com](http://www.tsugamiamerica.com) | [info@tsugamiamerica.com](mailto:info@tsugamiamerica.com)

**TSUGAMI AMERICA IS ISO 9001:2015 CERTIFIED QMS**