

TSUGAMI
AMERICA

B0326-III

CNC PRECISION AUTOMATIC LATHE

- 32mm Capacity Chucker Convertible Swissturn
- Main Side Gang with 7 Turning Tools, 7 Driven Tools (3 Modular), and 7 Id Tool Positions
- Sub Side Y Axis with 4 Driven Tool Positions (8 Modular) up to 38 Total Tools Available
- Oscillation Cutting Capable
- Direct Drive Guide Bushing
- FANUC 32i-B CNC Control

tsugamiamerica.com

B0326-III

6-AXIS OPPOSED GANG TOOL SWISS CNC LATHE

SPEED


- The B0326-III is chucker convertible and has Y-axis and 8 optional live tool positions on the sub spindle tool post allowing milling operations traditionally performed on the main spindle to be carried out on the sub spindle, internal to the cycle time.
- The horizontally opposed gang tool layout offers the shortest tool to tool path and therefore the quickest possible chip to chip time.
- Other features include integral spindle motors and an integral guide bushing motor for the fastest possible acc/dec times and quick C-axis positioning.

ACCURACY


- Tsugami has a long-term reputation for machine accuracy. It's all starts with their world-class engineering, incorporating symmetrically designed castings and an "A-frame" design of the gang slide. Utilizing the highest quality, motors, ball screws, rails and bearings assure precise motion control, and unique spindle cooling all work in concert and contribute to repeatable accuracy over the long life of the machine tool.

RIGIDITY


- Tsugami has the most rigid gang tool post in the industry due to opposing rail slides.
- Built on a heavy duty one piece cast iron base with thermally symmetrical construction, this machine features 0.1 micron axis resolution. A more rigid platform allows higher speeds and feeds.
- For extra peace of mind, the machines, motors, and FANUC controls are covered by an industry leading two-year parts and service warranty.

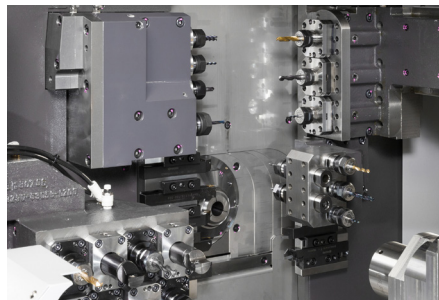


B0326-III Tool Zone

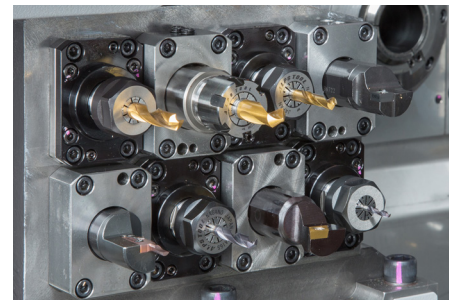

B0326-III Backworking Block

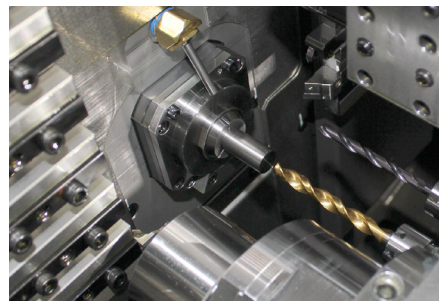


Deep Hole Drilling

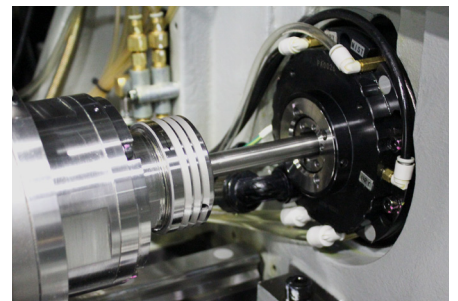


Servo Driven Guide Bushing

WORK ZONE & MODULAR TOOLING

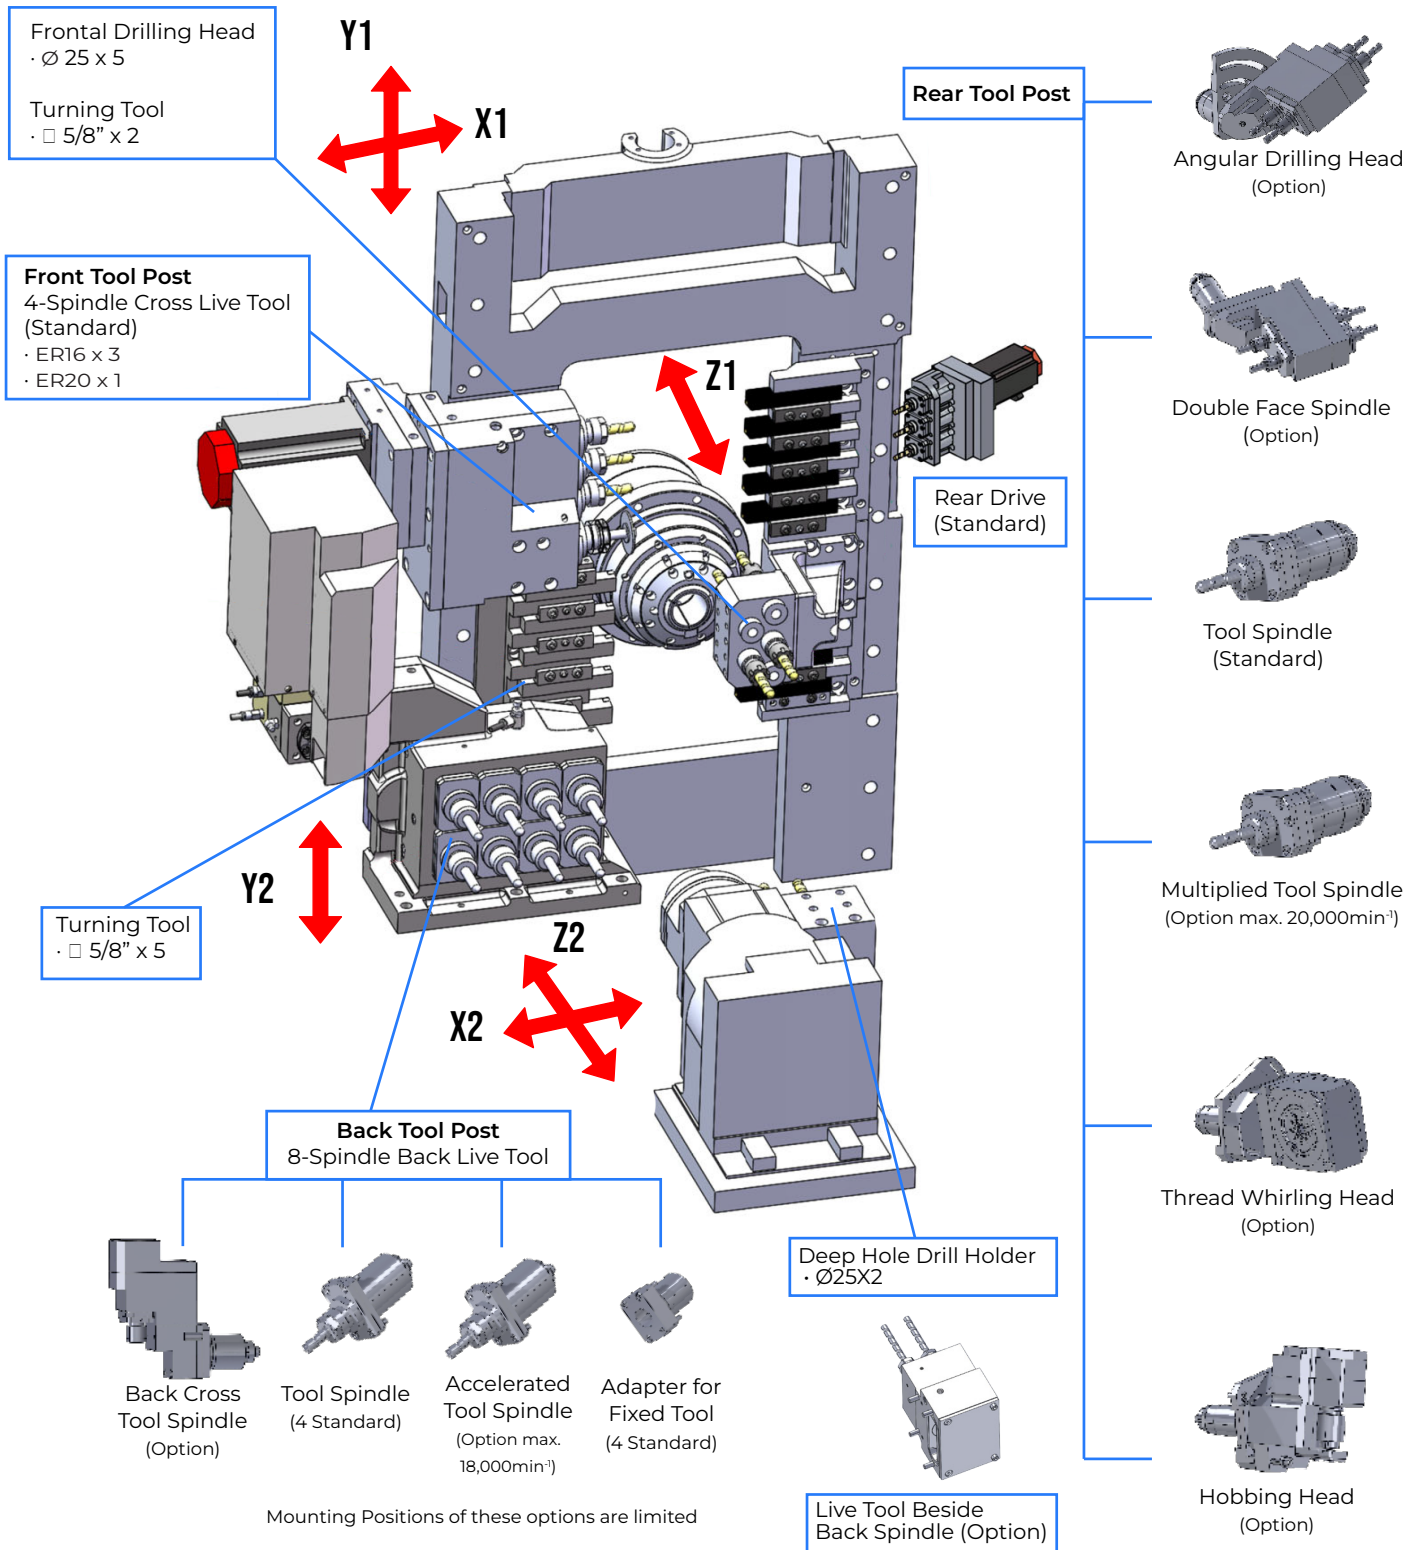

ACCESSORIES


Your B0386-III can be accessorized with various tooling options. Some of these options include:



Double Face Spindle




Quick Change Tooling

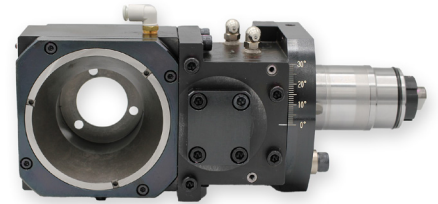


Thread Whirling Head



Back Tool Spindle



Back Cross Tool Spindle



Double Angular Drilling Head



Static Adapter

Our team can create anything needed to transform your tool zone to fit your part and process.

NEED SOMETHING CUSTOM?

From the machine Make Ready process, to integrating mechanical and robotic loading and unloading systems, to custom tool creation and spindle repair, IMG is dedicated to supporting all Tsgami users in North America!



Grinding Room



Make Ready Facility




Milling Room


OSCILLATION CUTTING

Oscillation Cutting is a technological breakthrough that oscillates a servo axis to help break chips in tough to cut materials, reduces heat in the cut, while not diminishing tool life.

- Productivity is increased by significantly reducing operator interruption to remove hanging or bird nesting chips.
- Easy to program by special G code
- Oscillation parameters can be changed easily within the program for machining multiple features with multiple tools.
- Can be used for many machining operations including OD turning, drilling, boring, grooving, cutoff, circular interpolation, and most FANUC canned cycles.



**WITHOUT
OSCILLATION**




**WITH
OSCILLATION**


AVAILABLE ON ALL PATHS

ABILE SOFTWARE

- Developed by Tsugami, Abile is capable of programming moderately complex machined parts. Abile incorporates all basic machines featured and several material types with predetermined feed rates.
- Abile allows first time users to quickly become proficient with Swiss processing despite having limited knowledge. Abile comes free with your machine purchase and requires no license fees, maintenance agreements, or seat limitations.
- Abile allows you to generate a 2 or 3-path part program, complete, with specific and editable codes in standard FANUC G Code format. Abile automatically generates machine process and provides component run times.

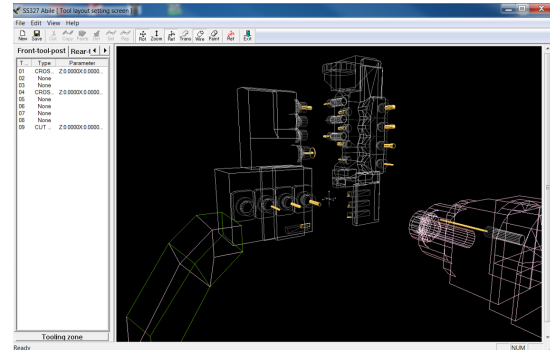

Program Generator

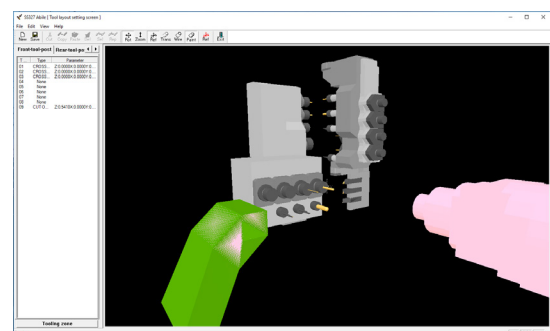

Tool Setting

MACHINE STANDARD SPECIFICATIONS

ITEMS

B0326-III

MACHINING RANGE

Working Barstock Diameter	ø32 mm (1.26 in.)
Max. Machining Length	330 mm (12.99 in.) (Direct-Drive Guide Bushing) 70 mm (2.76 in.) (Chucker Mode)
Max. Main Spindle Drilling Diameter	ø12 mm (.47 in.)
Max. Main Spindle Tapping Diameter	M10
Max. Back Spindle Chucking Diameter	ø32 mm (1.26 in.)
Max. Back Spindle Drilling Diameter	ø10 mm (.39 in.)
Max. Back Spindle Tapping Diameter	M8
Max. Tool Spindle Slotting Cutter Diameter	ø45 mm (1.77 in.)
Max. Tool Drilling Diameter	ø8 mm (.31 in.)
Max. Tool Spindle Tapping Diameter	M6 (Front Tool Post) M8 (Rear Tool Post/ Back Tool Post)

MACHINING CAPABILITY

Main Spindle Speed	200 to 8,000 min ⁻¹
Back Spindle Speed	200 to 8,000 min ⁻¹
Tool Spindle Speed	200 to 6,000 min ⁻¹
Total Tool Number (Standard Spec.)	34
Tool Size	.625 in. (square) / 25 mm (round)
Rapid Traverse Rate	35 m/min (105 ft/min) [(X1, Y1, Y2: 24 m/min (78.74 ft/min))]
Spindle Index	C1 Axis and C2 Axis

MOTORS

Main Spindle	5/7.5 Hp (3.7/5.5 kW)
Back Spindle	5/7.5 Hp (3.7/5.5 kW)
Cross Drill of Front Tool Post	1.4 Hp (1.0 kW)
Cross Drill of Rear Tool Post Drive	1.9 Hp (1.4 kW)
Rotary Tool of Back Tool Post	1.9 Hp (1.4 kW)
Rotary Guide Bushing	2 Hp (1.5 kW)
Z1, Y1, X2, Z2	1 Hp (0.75 kW)
X1, Y2	0.7 Hp (0.5 kW)
Coolant Pump	0.5 Hp (0.4 kW)
Lubricating Oil Pump	3 W

OTHER

Compressed air requirement	.4 MPa or more
Air discharge rate	100 NL/min
Power Source Requirements	16.8 KVA
Coolant Tank Capacity	260 L
Width x depth x height	2628 x 1280 x 1970 mm 103.5" x 50.4" x 77.5"
Weight	4,000 kg (8,818 lbs.)


NC SPECIFICATIONS

ITEMS


B0326-III

NC Unit	FANUC 32i-B
Controlled Axes	X1, Z1, Y1, X2, Y2, Z2, C1, C2
Least Input Increment	0.001 mm (X1/X2 axis in diameter)
Least Command Increment	X1, X2: 0.0005 mm, other axes: 0.001 mm
Maximum Programmable Value	± 8 digits
Interpolation Method	Linear/Circular/Polar/Helical/Cylindrical
Rapid Traverse Function	35 m/min (115 ft/min) (X1/Y1/Y2 24 m/min (78.74 ft/min)
Feedrate Function	1 to 6,000 mm/min
Feedrate Override	0 to 150%, 10% step
Dwell	G04 0 to 99999.999
ABS/INC Command	X, Z, Y, C: Absolute U, W, V, H: Incremental
Tool Offset Value	± 6 digits
Tool Offset Pairs	99, NC1 & NC2
LCD/MDI	10.4" color LCD
Display Language	English
Part Program Storage Size	2 MB
Registrable Programs	1,000
Spindle Function	S Code 5 digits
Tool Function	T Code 4 digits

* High Pressure Coolant Pump (Option)

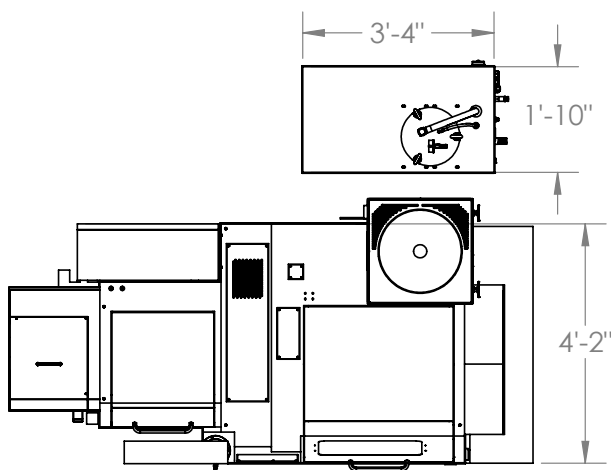

* Mist Collector (Option)

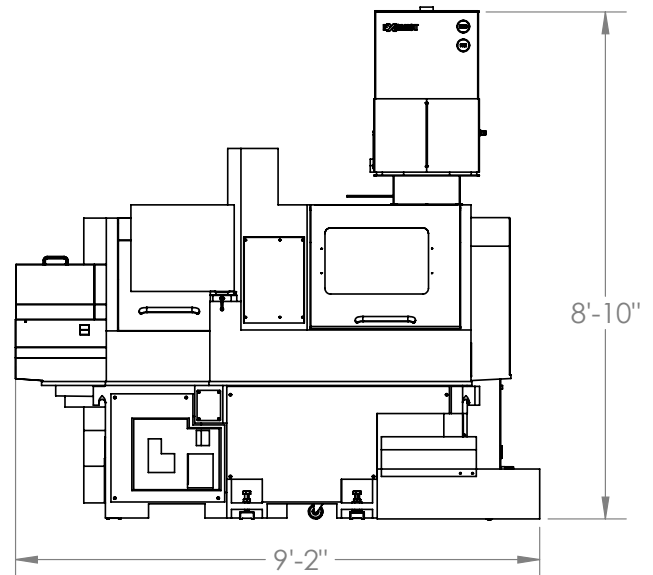

Since 1978, Tsugami America (formerly known as Tsugami/Rem Sales) has been the exclusive source for Precision Tsugami CNC machine tools in North America. Headquartered in Windsor, CT, Tsugami America provides machine tools and engineering expertise through an extensive network of authorized distributors and technical centers. Technical support and customer service are available throughout North America. Our distributors' trained service personnel provide technical support throughout the long life-cycle of our Tsugami machine tools, and work hand-in-hand with Tsugami America's engineers to deliver common-sense solutions to everyday problems.

Our application engineers help customers tackle and solve the toughest high-precision manufacturing challenges, on-time and on-budget. We have a 40-year history and reputation of serving the needs of small parts manufacturers in North America with the highest level of expertise and customer care. Our industry-respected, knowledgeable staff is comprised of both long-time employees and fresh faces all who share a commitment to provide you, our customers, with the competitive advantage to "do more with less" every day.

DISTRIBUTION NETWORK

The Robert E. Morris Company

Serving: CT, MA, RI, NH, VT, ME, NY, NJ
www.robertemorris.com

Morris Midwest Wisconsin & Illinois

Serving: WI, IL, MI Upper Peninsula
www.morrismidwest.com

Methods & Equipment Associates

Serving: MI
www.methods-equipment.com

Ellison Technologies

Serving: CA, WA, OR, NV
www.ellisontechnologies.com

Protecnic de México, S.A de C.V.

Serving: Mexico
www.protecnic.com.mx

Morris South

Serving: NC, SC, GA, VA, AL, MS, TN, AR, FL
www.morrissouth.com

Morris Great Lakes

Serving: NY, PA, WV
www.morrisgreatlakes.com

Technical Equipment Sales Co

Serving: OH, IN, KY
www.techequip.com

Hartwig, Inc.

Serving: MO, IL, IA, KS, CO, OK, TX, LA, MT, UT, NM, ID, WY
www.hartwiginc.com

Morris Midwest Minnesota

Serving: MN, ND, SD
www.morrismidwest.com

Precision 360

Serving: FL, PA, NJ, DE, MD
www.precision360.com

Arizona CNC

Serving: AZ, NV
www.arizonacnc.com

EMEC Machine Tools Inc.

Serving: Eastern Canada
www.emecmt.com

Thomas Skinner

Serving: Western Canada
www.thomasskinner.com

TSUGAMI AMERICA LOCATIONS

WINDSOR, CT

651 Day Hill Road
Windsor, CT 06095

FORT WAYNE, IN

4501 Earhart Drive, Suite B
Fort Wayne, IN 46809

BROOKLYN PARK, MN

9495 Winnetka Avenue N, Suite 100
Brooklyn Park, MN 55445

FULLERTON, CA

1521 E Orangethorpe Ave, Suite E
Fullerton, CA 92831

860-687-3400 | www.tsugamiamerica.com | info@tsugamiamerica.com

TSUGAMI AMERICA IS ISO 9001:2015 CERTIFIED QMS